



CL5 Midline & Highline

Balanced Flue Log Effect Stove

With Upgradeable Control Valve



Instructions for Use, Installation and Servicing

For use in GB, IE (Great Britain and Republic of Ireland)

IMPORTANT

THE OUTER CASING, FRONT AND GLASS PANEL BECOME EXTREMELY HOT DURING OPERATION AND WILL RESULT IN SERIOUS INJURY AND BURNS IF TOUCHED. IT IS THEREFORE RECOMMENDED THAT A FIREGUARD COMPLYING WITH BS 8423 (LATEST EDITION) IS USED IN THE PRESENCE OF YOUNG CHILDREN, THE ELDERLY OR INFIRM.

ENSURE THAT ALL COMBUSTIBLE MATERIALS ARE NOT POSITIONED ABOVE OR NEAR TO THE APPLIANCE OUTER CASING.

This product contains a heat resistant glass panel. This panel should be checked during Installation and at each servicing interval. If any damage is observed on the front face of the glass panel (scratches, scores, cracks or other surface defects), the glass panel must be replaced and the appliance must not be used until a replacement is installed. Under no circumstances should the appliance be used if any damage is observed, the glass panel is removed or broken.

It is essential that ALL of the screws that retain the glass frame are replaced and tightened correctly. Under no circumstances should the appliance be operated if any of these screws are loose or missing.

These Instructions must be left with the appliance for future reference and for consultation when servicing the appliance. Please make the customer aware of the correct operation of the appliance before leaving these instructions with them.

The commissioning sheet found on Page 3 of this Instruction manual must be completed by the Installer prior to leaving the premises.

Contents

CL5 Midline & Highline - Balanced Flue

Covering the following models:

Model	NATURAL GAS		LPG	
	Top Exit	Rear Exit	Top Exit	Rear Exit
CL5 Midline	YM581-041	YM581-032	YM581-561	YM581-553
CL5 Highline	YM581-129	YM581-118	YM581-599	YM581-594

Appliance Commissioning Checklist3

User Instructions4

Installation Instructions9

Technical Specifications 9

Site Requirements 11

Installation 15

Commissioning24

Servicing Instructions.....25

Fault Finding.....25

How to replace parts27

Basic spare parts list33

Service Records36

Information Requirement - Gas Heaters37



If you have purchased your stove or fire from an authorised stockist within our Expert Retailer Network, then automatically your product will carry a 2 year warranty as standard. The 2 year warranty can be further extended to a total warranty period of 5 years by registering your Yeoman Stove or Fireplace within one month of the latter of the purchase date or installation date. Accordingly, the start date for the warranty period is the date of purchase. During the registration process, the Expert Retailer details will be required for your Extended Warranty to be activated. Any product purchased outside of our Expert Retailer Network will carry a standard 12 month, non-extendable warranty.

It is a condition of the Extended Warranty that the installation complies with the relevant Building Regulations and is carried out by a suitably trained and qualified individual (GasSafe in the UK or equivalent in other countries) with the certificate of installation and the Commissioning Report on Page 3 completed and retained by the end user.

Full terms and conditions are detailed in the Warranty Statement on the Yeoman website www.yeomanstoves.com. In the event of any conflict of information the wording on the website shall prevail.

Important Note: Should any problems be experienced with your product, claims must first be submitted to the Expert Retailer where the appliance was purchased from who will offer immediate assistance or contact Yeoman on your behalf.



It is a requirement of the Building Regulations 2010 that the installation of this appliance is notified to the Local Authority. It is the responsibility of the GasSafe registered installer to carry out this notification to the Local Authority via the GasSafe register Competent Persons Scheme in England and Wales (different rules apply in Scotland and Northern Ireland).

When the installation has been notified, GasSafe will send a Building Regulations Compliance Certificate to you containing details of the work completed. Please ensure that the person responsible for the installation of this appliance completes this notification and records it in the Appliance Commissioning Checklist on page 3.

IT IS YOUR RESPONSIBILITY TO COMPLY WITH THE BUILDING REGULATIONS AND BE ABLE TO PRODUCE THIS CERTIFICATE SHOULD IT BE REQUIRED IN THE FUTURE.

Appliance Commissioning Checklist

To assist us in any guarantee claim please complete the following information:-

IMPORTANT NOTICE

Explain the operation of the appliance to the end user, hand the completed instructions to them for safe keeping, as the information will be required when making any guaranteed claims.

FLUE CHECK	PASS	FAIL	
1. Flue Is correct for appliance			
2. Flue flow Test N/A			
3. Spillage Test N/A			
GAS CHECK			
1. Gas soundness & let by test			
2. Standing gas pressure	mb		
3. Appliance working pressure (on High Setting) Minimum Pressure Requirement: NG - 17.5mbar LPG - 34.5mbar NB All other gas appliances must be operating on full	mb		
4. Gas rate	m ³ /h		
5. Does Ventilation meet appliance requirements N/A			
6. Have controls been upgraded (Upgradeable models only)	8455 Standard	YES	NO
	8456 Programmable Thermostatic and Timer	YES	NO
SAFETY CHECK			
1. Check soundness of the Thermocouple connections - including tightness and lead integrity			
2. Glass checked to ensure no damage, scratches, scores or cracks			
3. Glass frame secured correctly and all screws replaced			
BUILDING CONTROL NOTIFICATION	YES	NO	
1. Installer notified GasSafe/Local Authority of installation via Competent Persons Scheme?			

RETAILER AND INSTALLER INFORMATION

Retailer	Installation Company
.....
.....
Contact No.	Engineer
Date of Purchase	Contact No.
Model No.	GasSafe Reg No.
Serial No.	Date of Installation
Gas Type	

User Instructions

Welcome

Congratulations on purchasing your Yeoman CL stove, if installed correctly Yeoman hope it will give you many years of warmth and pleasure for which it was designed.

The purpose of this manual is to familiarise you with your appliance, and give guidelines for its installation, operation and maintenance. If, after reading, you need further information, please do not hesitate to contact your Yeoman retailer.

WARNING



In the event of a gas escape or if you can smell gas, please take the following steps:

- **Immediately turn off the gas supply at the meter/emergency control valve**
- **Extinguish all sources of ignition**
- **Do not smoke**
- **Do not operate any electrical light or power switches (On or Off)**
- **Ventilate the building(s) by opening doors and windows**
- **Ensure access to the premises can be made**

Please report the incident immediately to the National Gas Emergency Service Call Centre on 0800 111 999 (England, Scotland and Wales) , 0800 002 001 (N. Ireland) or in the case of LPG, the gas supplier whose details can be found on the bulk storage vessel or cylinder.

The gas supply must not be used until remedial action has been taken to correct the defect and the installation has been recommissioned by a competent person.

1. General

- 1.1 Installation and servicing must only be carried out by a competent person whose name appears on the GasSafe register. To ensure the engineer is registered with GasSafe they should possess an ID Card carrying the following logo:




- 1.2 In all correspondence, please quote the appliance type and serial number, which can be found on the data badge. The databadge is located next to the control assembly.
- 1.3 **Do not** place curtains above the appliance: You must have 300mm clearance between the appliance and any curtains at either side.

- 1.4 No furnishings or other objects should be placed within 1 metre of the front of the appliance.
- 1.5 If a shelf is fitted, a distance of 225mm above the appliance is required.
- 1.6 If any cracks appear in the glass panel do not use the appliance until the panel has been replaced.
- 1.7 If, for any reason, the flue has to be removed from the appliance, the seals must be replaced in the inner spigot.
- 1.8 Do not obstruct the flue terminal in any way i.e. by planting flowers, trees shrubs etc. in the near vicinity, or by leaning objects up against the terminal guard.
- 1.9 Do not put any objects on the terminal guard; it will lose its shape.
- 1.10 Do not use a garden sprinkler or hose near the terminal.
- 1.11 This product is guaranteed for 5 years from the date of installation, as set out in the terms and conditions of sale between Yeoman and your local Yeoman Retailer. Please consult with your local Yeoman Retailer if you have any questions. In all correspondence always quote the Model Number and Serial Number.

2. Operating the Appliance


The control valve is located behind the plinth.

- 2.1 Pull the lower door open from the right hand side to access the controls, see Diagram 1.

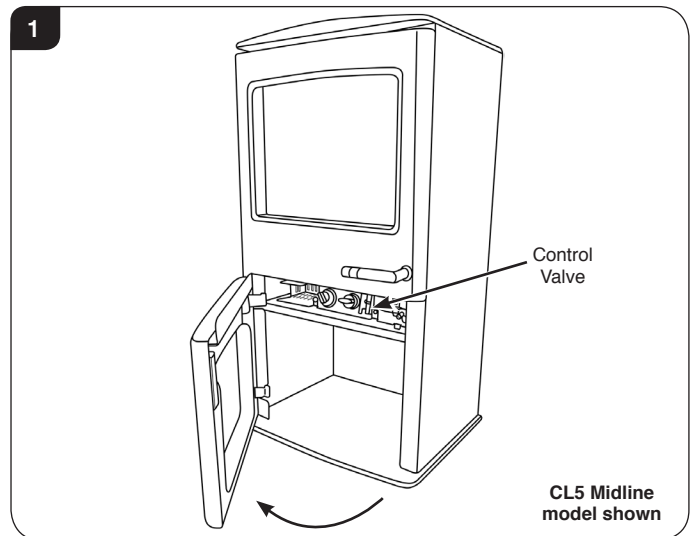

The valve has two controls, see Diagram 2.

1. The right-hand knob controls the pilot ignition.
2. The left-hand knob controls the main burner.

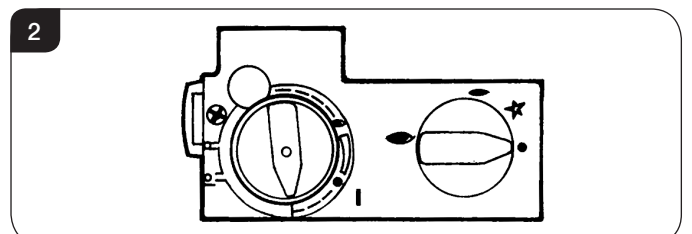

User Instructions

- 2.2 Refer to separate instructions if your appliance is upgraded to include battery remote control. The instructions below apply whether or not you have the remote upgrade.

Lighting the Pilot

- 2.3 To start the left-hand and right-hand control knobs must both point to off (●):
- 2.4 Press in the right-hand control knob and rotate anti-clockwise until a click is heard. Continue to press in. The knob points to the pilot (◄).

The pilot is lit.

- 2.5 Keep the knob depressed for 10 seconds before releasing. The pilot remains lit.

Repeat the above steps if the pilot does not stay lit.

NOTE: If the pilot goes out, the Interlock system prevents you lighting again for a short period.

- 2.6 If, after repeating the above steps the pilot does not light, contact your Retailer or Installer.
- 2.7 Turn the right-hand knob to the left to main burner setting (◄).

Adjusting the Flame height

- 2.8 You can now adjust the flame height and temperature using the left-hand control knob.
- 2.9 Turn the left-hand knob anti-clockwise to increase the flame height.
- 2.10 Turn clockwise to decrease the height.

i **IMPORTANT: YELLOW FLAMES TYPICALLY APPEAR WHEN THE APPLIANCE HAS REACHED NORMAL OPERATING TEMPERATURE. THIS CAN TAKE UP TO 30 MINUTES.**

! **WARNING: IF THE APPLIANCE FAILS TO LIGHT OR BECOMES EXTINGUISHED IN USE, WAIT 3 MINUTES BEFORE ATTEMPTING TO RELIGHT.**

3. Turning OFF the Appliance

- 3.1 To turn the main burner off turn the left-hand knob until it points to off (●). Just the pilot remains lit.
- 3.2 Press in and turn the right-hand knob until it points to off (●). The pilot goes out.

4. Upgrading the Appliance

- 4.1 The appliance is fitted with a control valve that can easily be upgraded to battery powered remote control. There are two versions of this control which can be obtained through your local Yeoman stockist. There is no requirement for this upgrade to be carried out by an approved GasSafe engineer. However Yeoman recommend that this task is undertaken by a suitably competent person.
- 4.2 This upgrade can be fitted before or after installation but if side clearances are limited then it will be easier to upgrade the appliance before installation. Full instructions are included with the kit.

i **If the appliance is left unattended for long periods of time (e.g. vacation), it is recommended to place the control valve in the Off or Pilot position.**

Take care when leaving the appliance unattended, in exceptional circumstances sound waves from sources other than the transmitter can cause changes in the flame height adjustment.

DO NOT install two or more appliances using upgradeable controls in the same room, interference between the remote control frequencies can occur.

Standard Remote Control (PART NUMBER 8455)

- 4.3 This remote control can control the gas appliance after the pilot has been lit. It can turn the main burner on and regulate it from low through to high and back again. It can turn the main burner off leaving the pilot burning.

Thermostatic and Timer Remote Control (PART NUMBER 8456)

- 4.4 This remote control can control the gas appliance after the pilot has been lit.

MANUAL MODE

Can be used to turn the main burner on and manually regulate it from low through to high and back again. It can also be used to turn the main burner off leaving the pilot burning.

AUTO MODE

Will automatically regulate the room to a pre-set temperature.

TIMER MODE

Will turn the appliance on and off according to a pre-set programme and automatically regulate the room temperature during the two on periods.

User Instructions

5. Cleaning the Appliance




IMPORTANT: THE OUTER PANNELLING OF THE YEOMAN CL IS MADE FROM CAST IRON. USE CAUTION WHEN INSTALLING, REMOVING AND STORING AS THE COMPONENTS ARE HEAVY AND SHOULD BE HANDLED CAREFULLY.

5.1 Make sure the fire and surrounds are cool before cleaning.


Use:

- A dry cloth to clean the appliance casting.
- A damp cloth for the glass front.


5.2 Pull the lower door open from the right hand side to access the controls, see Diagram 3.

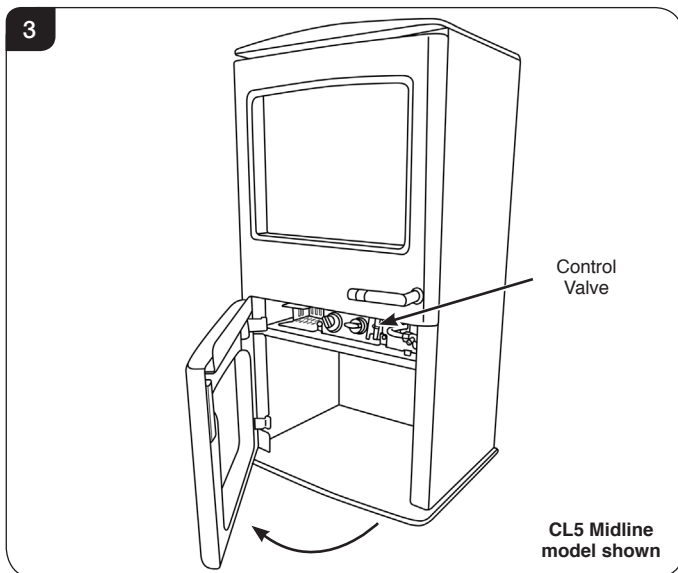

5.3 Remove the frame to gain access to the viewing aperture by lifting the hooks clear of the slots on the front of the appliance, see Diagram 4.

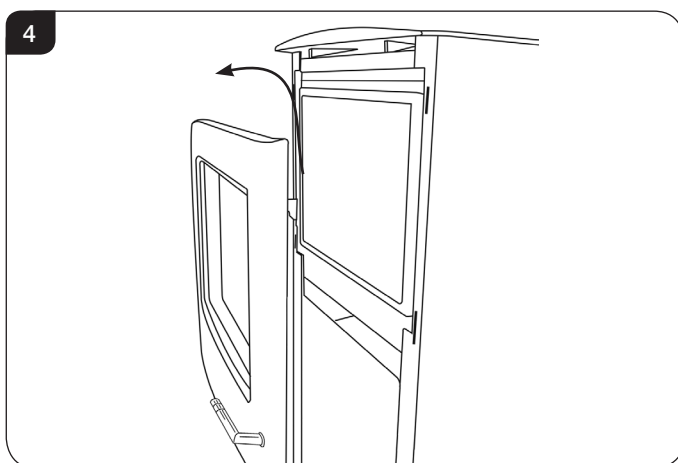

5.4 Using screwdriver remove the eight screws securing the window panel to the appliance, see Diagram 5. Take care to support the glass when removing the screws.

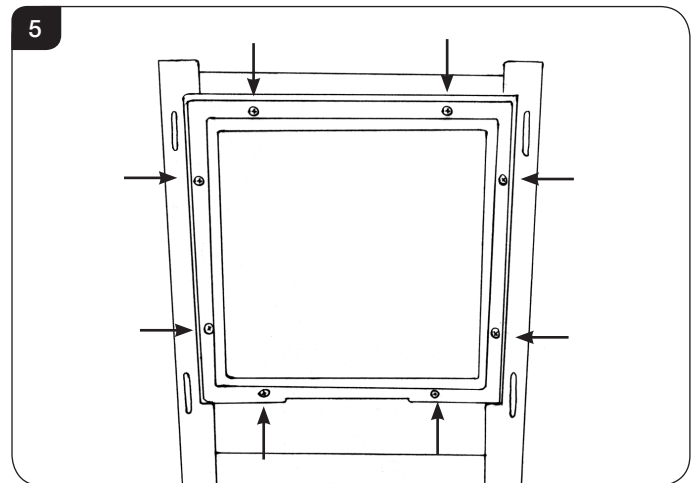

5.5 The glass frame must be refitted to the appliance following cleaning or servicing. Hold in position and secure with the screws.

5.6 Replace ALL of the securing screws ensuring that a screw is present in all fixing slots.



UNDER NO CIRCUMSTANCES SHOULD THE APPLIANCE BE USED IF ANY OF THE GLASS FRAME RETAINING SCREWS ARE LOOSE OR MISSING.

User Instructions

6. Arrangement of Fuel Bed

Advice on handling and disposal of fire ceramics



The fuel effect of the log version of this appliance is made from Refractory Ceramic Fibre (RCF), a material which is commonly used for this application.

Protective clothing is not required when handling these articles, but we recommend you follow normal hygiene rules of not smoking, eating or drinking in the work area and always wash your hands before eating or drinking.

To ensure that the release of RCF fibres are kept to a minimum, during installation and servicing a HEPA filtered vacuum is recommended to remove any dust accumulated in and around the appliance before and after working on it. When servicing the appliance it is recommended that the replaced items are not broken up, but are sealed within heavy duty polythene bags and labelled as RCF waste.


RCF waste is classed as stable, non-reactive hazardous waste and may be disposed of at a licensed landfill site.

Excessive exposure to these materials may cause temporary irritation to eyes, skin and respiratory tract; wash hands thoroughly after handling the material.

7. Log Layout


LOGS MUST BE POSITIONED ACCORDING TO THE FOLLOWING INSTRUCTIONS TO GIVE THE CORRECT FLAME EFFECT.

- 7.1 Ensure the burner tray is clean and free from any debris, see Diagram 6.

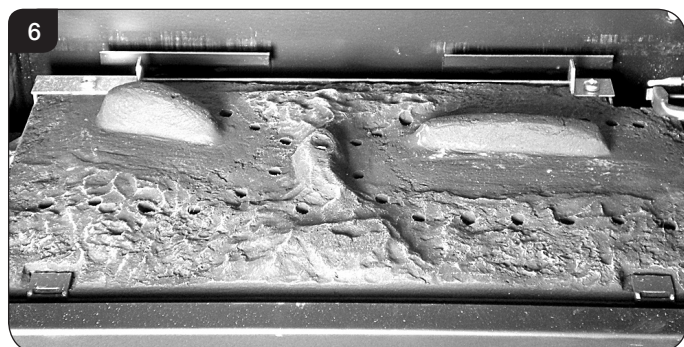


The three logs that make up the fuel bed are visually distinct and fit into specific parts on the burner tray.


- 7.2 Place the rear log into position between the rear brackets and pushed up against the back panel as illustrated in Diagram 7.

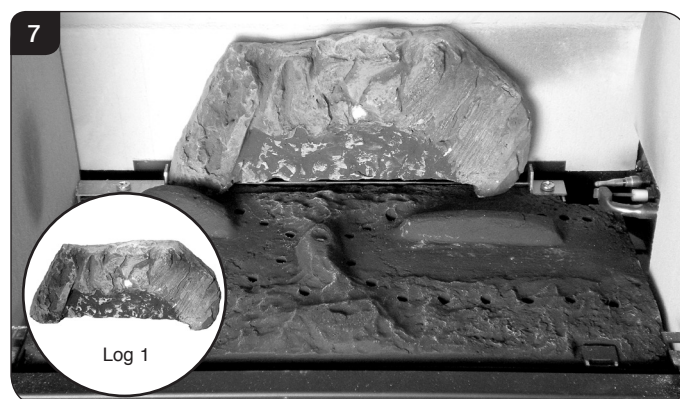

- 7.3 Place the second log into the left hand groove on the burner tray, see Diagram 8. The log should butt up against the raised molding and the left hand side liner.

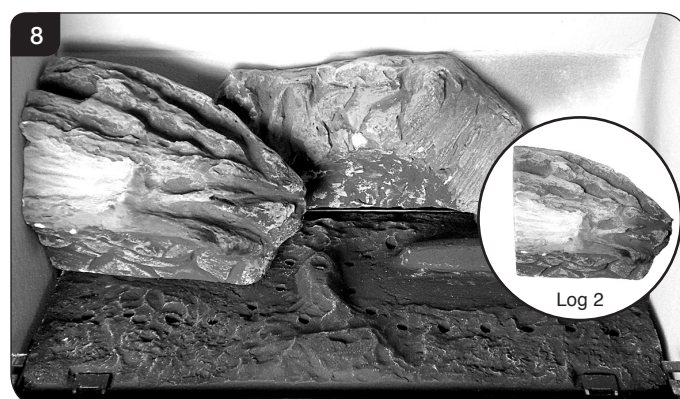


- 7.4 Place the third log into the groove on the right hand side, see Diagram 9. The log should butt up against the raised molding and the right hand side liner.

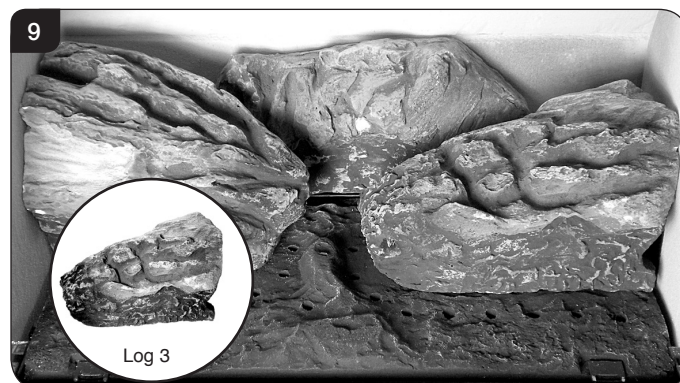


User Instructions


- 7.5 Once the logs are in there are two embers which can be loosely placed at the front of the fire bed and cover the tabs securing the burner tray, see Diagram 10.

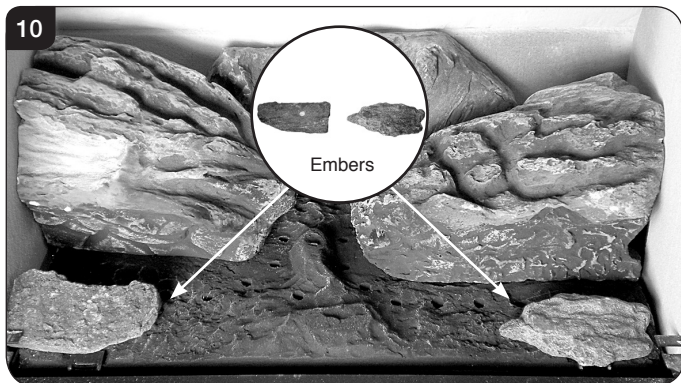

- 7.6 Sparingly spread an amount of the Embaglow fibres provided, covering the ports in the burner tray, see Diagram 11.
It is essential to cover the port in the middle of the burner tray in order to get the most visually appealing flame picture.
Take care not to use more than half a packet per application.
WARNING - DO NOT PLACE NEAR THE PILOT AREA.

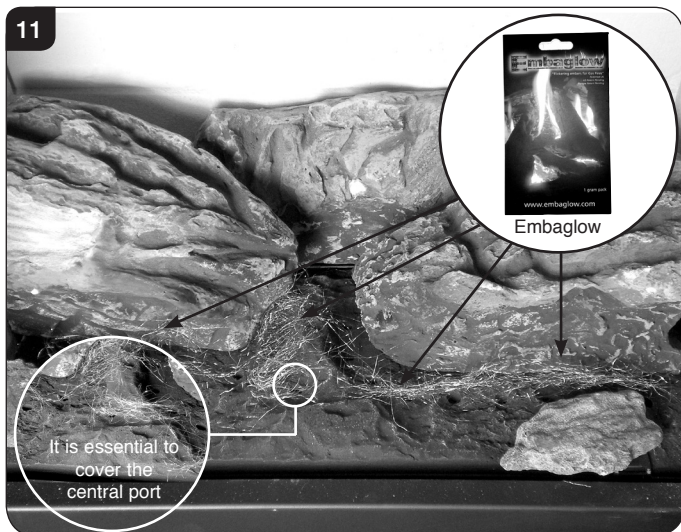

- 7.7 Fix log bar into position, see Diagram 12.

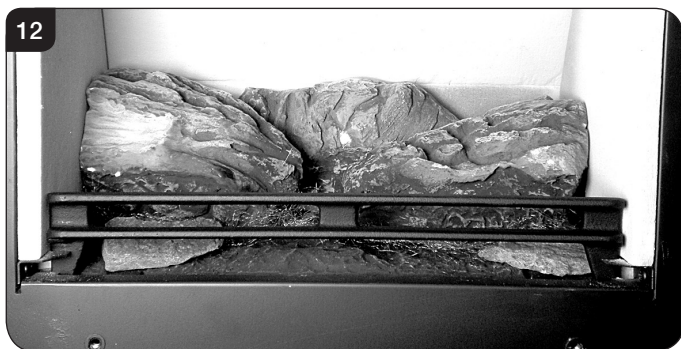

- 7.8 Once the fuel bed arrangement is complete, replace the glass frame and secure, see User Section 5.

8. Flame Failure Device

- 8.1 This is a safety feature incorporated on this appliance which automatically switches off the gas supply if the pilot goes out and fails to heat the thermocouple.

IF THIS OCCURS DO NOT ATTEMPT TO RELIGHT THE APPLIANCE FOR 3 MINUTES.

9. Running In

- 9.1 During initial use of a new YEOMAN appliance a strong odour will be encountered as various surface coatings become hot for the first time. Although these odours are harmless it is recommended that the appliance is operated on maximum for 4 to 8 hours in order to fully burn off these coatings. After this period the odours should then disappear.

If the odours persists, please contact your installer for advice.

- 9.2 During the first few hours of burning there may be discolouration of the flames. This will also disappear after a short period of use.

10. Servicing

- 10.1 The appliance must be serviced every 12 months by a qualified GasSafe Engineer. In all correspondence always quote the Model number and the Serial number which may be found on the Commissioning Checklist (Page 3).

11. Ventilation

- 11.1 This appliance requires no additional ventilation.

12. Installation Details

- 12.1 Your installer should have completed the commissioning sheet at the front of this book. This records the essential installation details of the appliance. In all correspondence always quote the Model number and Serial number.

13. Hot Surfaces

- 13.1 Parts of this appliance become hot during normal use.
13.2 Provide a suitable fire guard to protect young children and the infirm.

Installation Instructions

Technical Specification

Covering the following models:

Model	NATURAL GAS		LPG	
	Top Exit	Rear Exit	Top Exit	Rear Exit
CL5 Midline	YM581-041	YM581-032	YM581-561	YM581-553
CL5 Highline	YM581-129	YM581-118	YM581-599	YM581-594

Model	Gas CAT.	Gas Type	Working Pressure	Aeration	Injector	Gas Rate m ³ /h	Input kW (Gross)		Country
							High	Low	
CL5 BF	I ₂ H	Natural (G20)	20mbar	6mm x 10mm	158	0.409	4.3	2.5	GB, IE
	I ₃ P	Propane (G31)	37mbar	6mm x 10mm	110	0.162	4.3	2.5	GB, IE
				16mm x 23mm					
Efficiency Class 2 - 84.3% Net / NOx Class 4									
Flue Outlet Size Ø 100mm									
Flue Inlet Size Ø 150mm									
Gas Inlet Connection Size Ø 8mm									

i The net efficiency of this appliance has been measured as specified in EN613:2001 and the result after conversion to gross using the appropriate factor from Table E4 of SAP 2012 is 77.6%. The test data has been certified by Kiwa Nederland BV. The gross efficiency value may be used in the UK Government's Standard Assessment Procedure (SAP) for energy rating of dwellings.

RESTRICTOR REQUIREMENT				
VERTICAL & HORIZONTAL FLUE			TOP EXIT - VERTICAL ONLY INCLUDING OFFSET	
Vertical Flue Height	Horizontal Length	Restrictor Size	Vertical Flue Height	Restrictor Size
500mm - 999mm	250mm - 1000mm	No restrictor	3000 - 4999mm	Ø 52mm (Sliding)
1000mm - 1999mm	250mm - 1000mm	Ø 60mm	5000mm - 10,000mm	Ø 40mm (Sliding)
2000mm - 3000mm	250mm - 5000mm	Ø 52mm		


Installation Instructions

Technical Specification

This appliance has been certified for use in countries other than those stated. To install this appliance in these countries, it is essential to obtain the translated instructions and in some cases the appliance will require modification. Contact Yeoman for further information.

PACKING CHECKLIST

Qty Description	Fixing Kit containing:-
For Log Layout	1 x Instruction Manual
1 x Log Set	2 x Wood Screws
1 x Packet of Embaglow	2 x Rawl Plugs
	2 x Washers
	1 X 40mm Ø Flue Restrictor (Vertical Flue only)

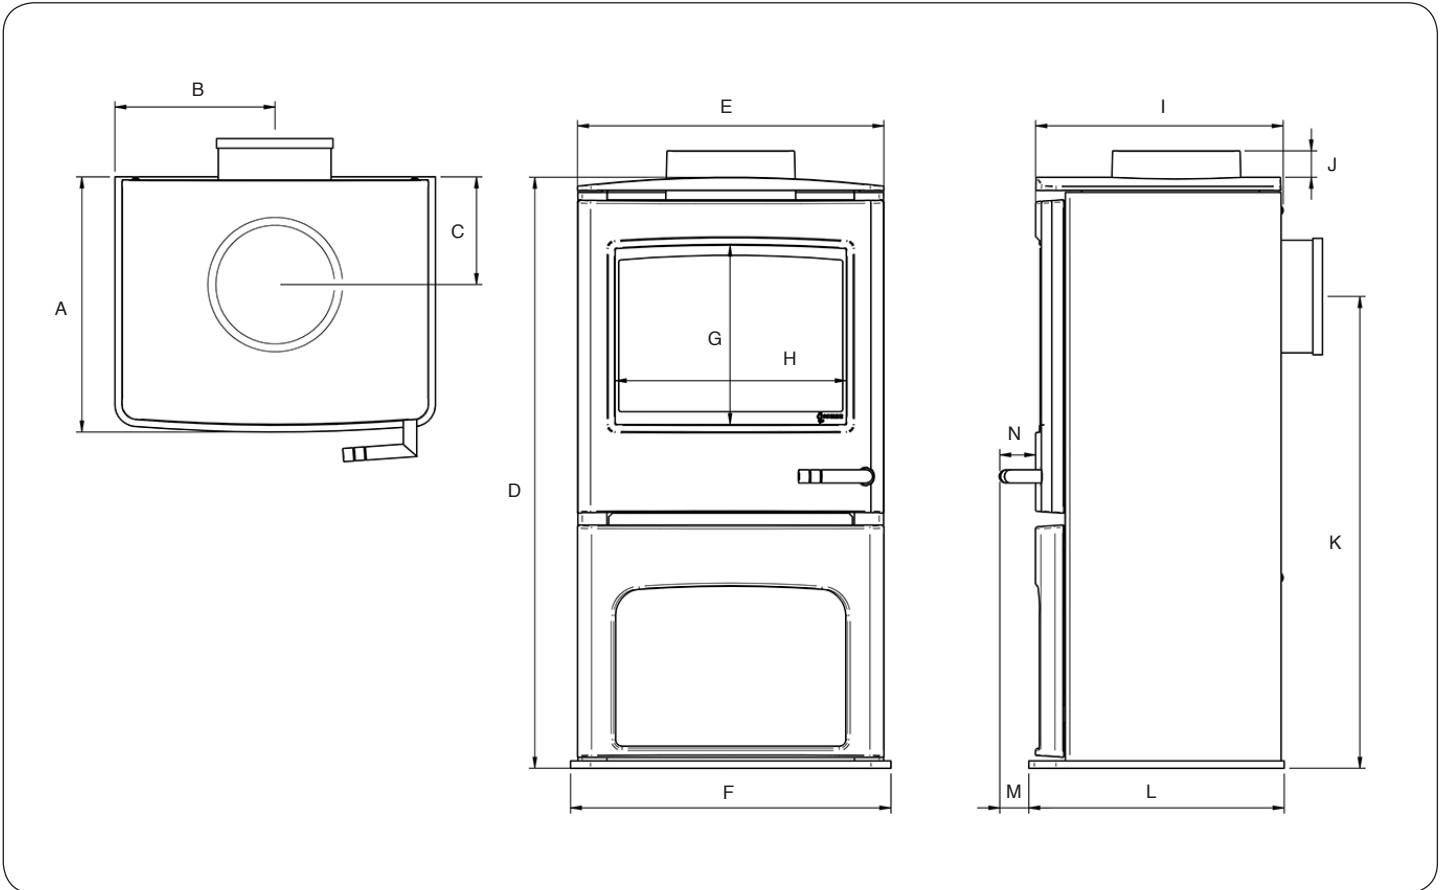

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N
CL5 Midline	347	218	146	803	416	435	244	314	336	36	641	347	39	49
CL5 Highline	347	218	146	912	416	435	244	314	336	36	750	347	39	49

Installation Instructions

Site Requirements

1. Flue and Chimney Requirements

Note: This appliance must only be installed with the flue supplied.

You must adhere to the following:

- 1.1 The flue must be sited in accordance with BS5440: Part 1 (latest edition) see Diagram 1.
- 1.2 Fit a guard to protect people from any terminal less than 2 metres above any access such as level ground, a balcony or above a flat roof.
- 1.3 All vertical and horizontal flues must be securely fixed and fire precautions followed in accordance with local and national codes of practice.
- 1.4 A restrictor may be required. Refer to Technical Specifications on page 9.

- 1.5 Two types of flue terminals are available, horizontal and vertical. To measure for a horizontal terminal:
 - Decide on the terminal position.
 - Measure the height from the top of the appliance to the centre of the required outlet.

For minimum and maximum flue dimensions see Diagram 3. Allow enough room either above or to the side of the appliance to assemble the flue on top.


Assemble a horizontal flue in the following order:

- Vertical section
- 90° elbow
- Horizontal plus terminal

Support the opening of a masonry installation with a lintel.

- 1.6 Only the horizontal terminal section can be reduced in size.

1 UK Dimensions

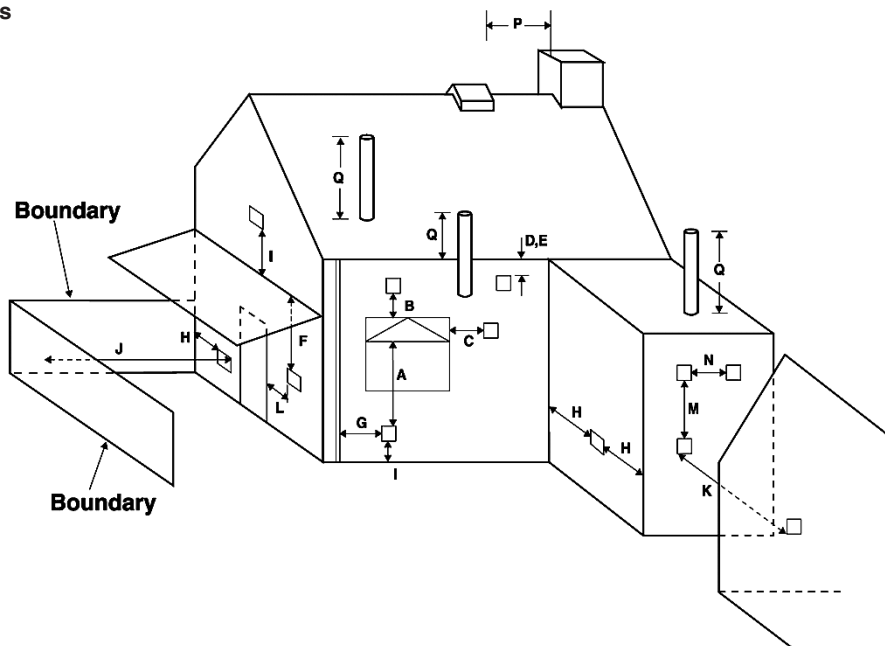

Dimension	Terminal Position	Minimum Distance
A*	Directly below an opening	600mm
B*	Above an opening	300mm
C*	Horizontally next to an opening	400mm
D	Below gutters, soil pipes or drain pipe	300mm
E	Below eaves	300mm
F	Below balcony or car port roof	600mm
G	From a vertical drain pipe or soil pipe	300mm
H	From an internal or external corner or to a boundary alongside the terminal	600mm
I	Above ground, roof or balcony level	300mm

Dimension	Terminal Position	Minimum Distance
J	From a surface or boundary facing the terminal	600mm
K	From a terminal facing the terminal	600mm
L	From an opening in the car port (e.g. door, window) into the dwelling	1200mm
M	Vertically from a terminal on the same wall	1200mm
N	Horizontally from a terminal on the same wall	300mm
P	From a structure on the roof	600mm
Q	Above the highest point of intersection with the roof	300mm


* In addition, the terminal should not be nearer than 300mm to an opening in the building fabric formed for the purpose of accommodating a built-in element such as a window frame.

Installation Instructions

Site Requirements

2. Rear Flue (8526)

- 2.1 This flue extends horizontally from the back of the appliance, see Diagram 2.

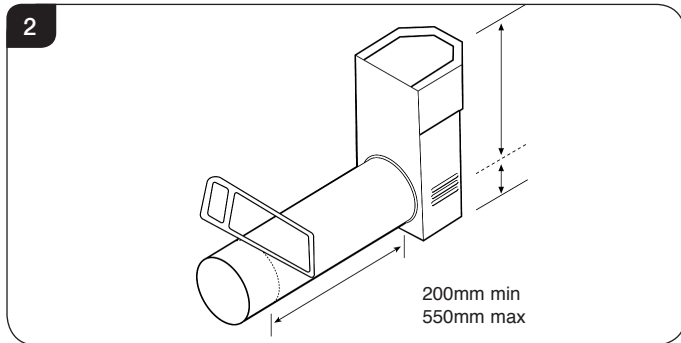

Terminal dimensions:
395 x 200 x 200 mm (H x W x D)
Guard supplied
Cut to length as required on site, see Diagram 2.


3. Top Exit Flues

There are two types of flue terminal: horizontal (Section 3B) and vertical (Section 3D).

3A. Top Flue Up and Out Kit (8523/8523AN)

- 3.1 This flue rises vertically from the top of the appliance, then continues horizontally outward, see Diagram 3. The basic kit comprises:

- 1 x 500mm vertical length
- 1 x 500mm terminal length
- 1 x 90 degree elbow
- 1 x wall plate
- 1 x 52mm restrictor
- 1 x 60mm restrictor
- 1 x 75mm restrictor
- 4 x fixing screw

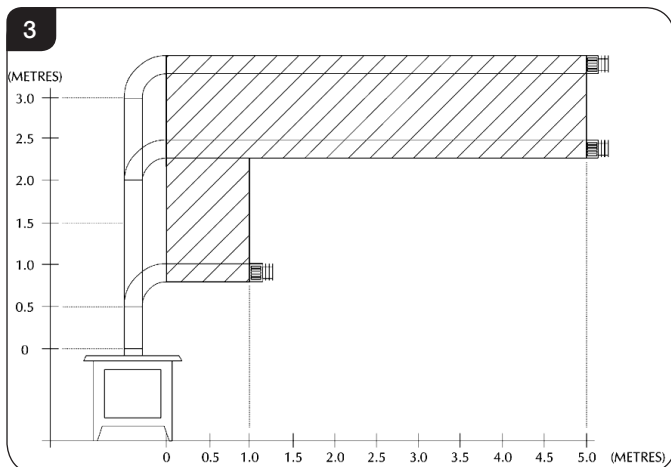

- 3.2 This kit provides the minimum materials. Extra lengths can be added to the vertical and horizontal sections; refer to Section 4.


- 3.3 Refer to Installation Instructions, Technical Specification on page 12 to identify when to use a restrictor.

3B. For horizontal terminal installations:

- 3.4 Decide on the terminal position.
- 3.5 Measure the height from the top of the appliance to the centre of the required hole. For minimum and maximum dimensions see Diagram 3 & 4.
- 3.6 To fit the flue you must have access to the top or the side of the appliance to connect the flue.
- 3.7 Assemble the vertical sections making sure the top plate and flue collar are fitted before the flue pipe.
- 3.8 Add the 90° elbow.
- 3.9 Add the horizontal section and terminal. **Only the horizontal part can be reduced in size.**
- 3.10 A masonry installation requires the addition of a suitable lintel to support the opening. Refer to Installation Instructions, Technical Information for details of the flue length.

3C. Top Flue Up and Out with Additional Bend

- 3.11 An additional bend can be used on the horizontal section (45° or 90°) but the overall horizontal flue is reduced, see Diagram 4.

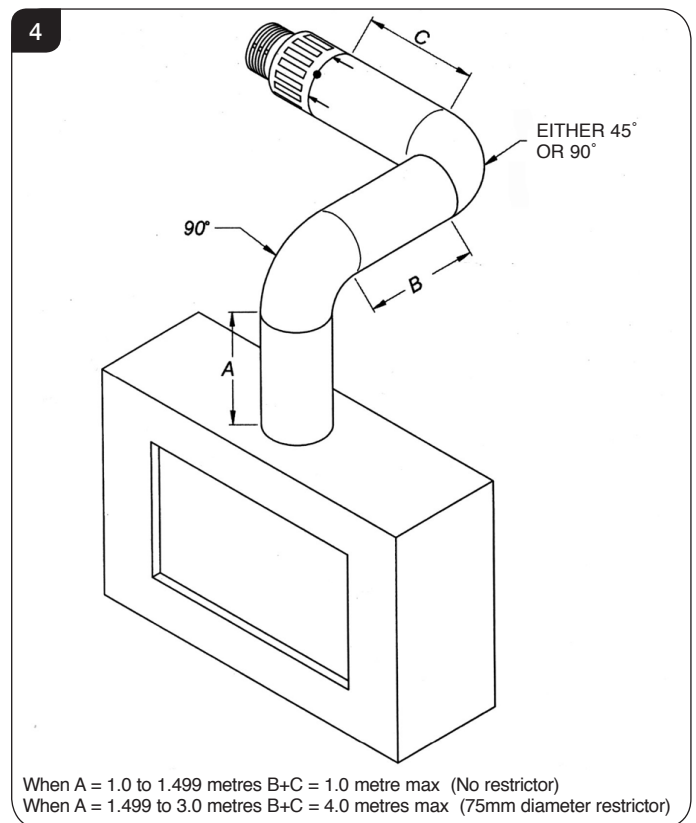

Installation Instructions

Site Requirements

3D. Top Flue Vertical Kit (999-539/999-539AN)


3.12 This flue is vertical from the top of the appliance, see Diagram 6. A minimum vertical rise of 3m (9'10") to a maximum of 10m (32'10").

The basic kit comprises:

- 2 x 1m lengths
- 1 x 1m terminal lengths
- 1 x 52mm restrictor (sliding plate assembly)
- 1 x 47mm restrictor (sliding plate assembly)

3.13 Extra lengths can be added, see Diagram 5.

3.14 Refer to Installation Instructions, Technical Specification to identify when to use a restrictor.

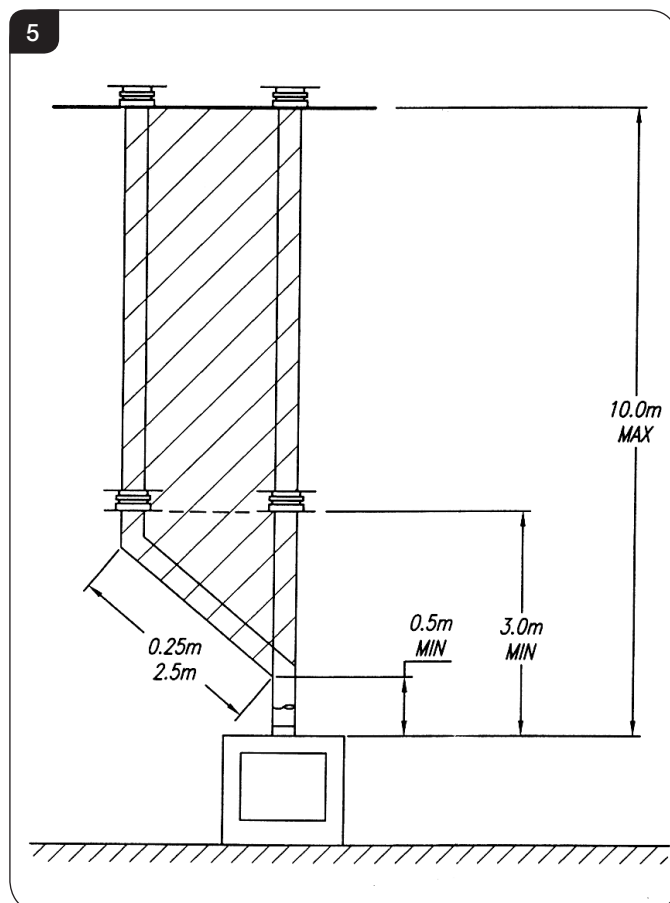

3E. Top Flue Vertical Offset Kit (8530/8530AN)

3.15 Used with kit 999-539. A minimum rise of 500mm (19½) is required to the first bend, see Diagram 5.

4. Optional Extra Flue Lengths and Bends

Nominal Length	Actual Length	Stainless Finish	Anthracite Finish
200mm	140mm	8527	8527AN
500mm	440mm	8528	8528AN
1000mm	940mm	8529	8529AN
45° Bend	N/A	8507	8507AN
90° Bend	N/A	8508	8508AN
Optional Flue Collar		8548MB	

5. Gas Supply

THIS APPLIANCE IS INTENDED FOR USE ON A GAS INSTALLATION WITH A GOVERNED METER.

- 5.1 Before installation, ensure that the local distribution conditions (identification of the type of gas and pressure) and the adjustment of the appliance are compatible.
- 5.2 Ensure the gas supply delivers the required amount of gas and is in accordance with the rules in force.
- 5.3 You can use soft copper tubing on the installation and soft soldered joints outside the appliance and below the fire.
- 5.4 A factory fitted isolation device is part of the inlet connection; no further isolation device is required.
- 5.5 All supply gas pipes must be purged of any debris that may have entered prior to connection to the appliance.
- 5.6 The gas supply enters through the rear of the LEFT-HAND side of the outer box:
- 5.7 The gas supply must be installed in a way that does not restrict the removal of the appliance for servicing and inspection.

6. Ventilation

- 6.1 This appliance requires no additional ventilation.

Installation Instructions

Site Requirements

7. Appliance Location

7.1 It is not necessary to site these products on a non-combustible floor. However, for practical reasons, the floor should be flat and solid to allow the appliance to be levelled and secured in place.

7.2 This appliance may be situated anywhere in the room, but due consideration should be taken to ensure that it is sited within the constraints of the allowable flue configuration.

DO NOT INSTALL APPLIANCE ON A CARPET.


7.3 If the appliance is to be sited against a combustible wall, a clearance of 50mm should be allowed between the wall and the rear of the appliance.

MINIMUM CLEARANCE


7.4 The appliance is not suitable for installation against a combustible wall.

7.5 **Ensure that all minimum clearances to combustible materials are complied with as shown in Diagrams 6 & 7.**

The specified clearances provide the minimum distance to combustible materials. If the appliance is intended to be installed into a non-combustible opening the clearance to the **sides and above** the appliance can be reduced. However, it is recommended that the specified clearances are maintained irrespective of the materials used in the construction of the opening to allow adequate air flow and access to controls. **The clearance at the rear of the appliance must always be a minimum of 50mm.**

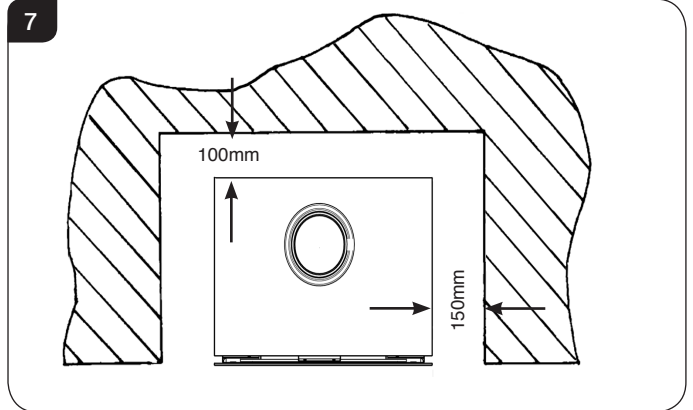

7.6 The above dimensions provide adequate clearance to combustible materials. It may be necessary to add additional clearance so that spillage tests can be performed when necessary.

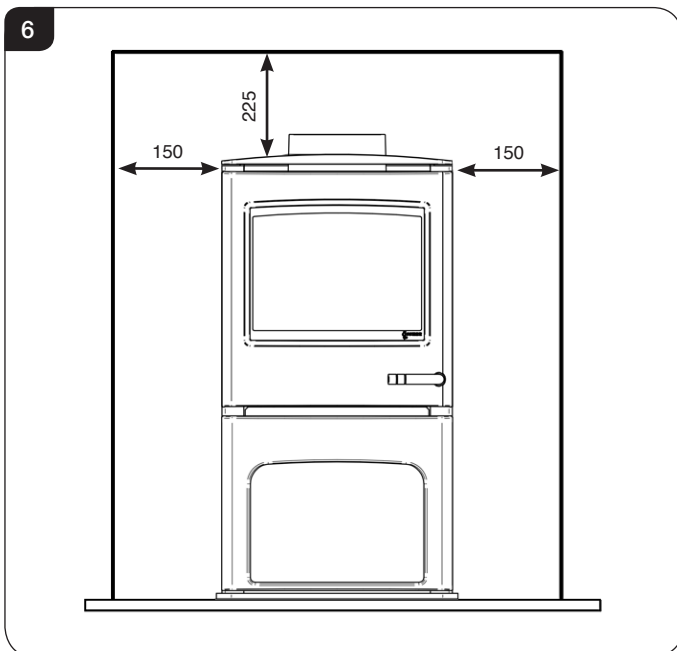

Installation Instructions

1. Safety Precautions

- 1.1 For your own and other's safety, you must install this appliance according to local and national codes of practice. Failure to install the appliance correctly could lead to prosecution. **Read these instructions before installing and using this appliance.**
- 1.2 These instructions must be left intact with the user.
- 1.3 Do not attempt to burn rubbish on this appliance.
- 1.4 Keep all plastic bags away from young children.
- 1.5 Do not place any object on or near to the appliance and allow adequate clearance above the appliance.

IF THE APPLIANCE IS EXTINGUISHED OR GOES OUT IN USE, WAIT 3 MINUTES BEFORE ATTEMPTING TO RELIGHT THE APPLIANCE.



IMPORTANT: REFER TO DATA BADGE AND TECHNICAL SPECIFICATION AT THE FRONT OF THE MANUAL TO ENSURE THE APPLIANCE IS CORRECTLY ADJUSTED FOR THE GAS TYPE AND CATEGORY APPLICABLE IN THE COUNTRY OF USE.

FOR DETAILS OF CHANGING BETWEEN GAS TYPES REFER TO SERVICING, SECTION 14, REPLACING PARTS.

Unpacking

- 1.6 Remove the appliance from its packaging, and check that it is complete and undamaged.
- 1.7 The cast plate is stored on top of the appliance. Remove and store in a safe place.

Put the loose ceramic parts to one side so that they are not damaged during installation.

2. Upgrading the Appliance

- 2.1 The appliance is fitted with a control valve that can easily be upgraded to battery powered remote control. There are two versions of this control which can be obtained through your local Yeoman stockist. There is no requirement for this upgrade to be carried out by an approved GasSafe engineer. However Yeoman recommend that this task is undertaken by a suitably competent person.
- 2.2 This upgrade can be fitted before or after installation but if side clearances are limited then it will be easier to upgrade the appliance before installation. Full instructions are included with the kit.



If the appliance is left unattended for long periods of time (e.g. vacation), it is recommended to place the control valve in the Off or Pilot position.

Take care when leaving the appliance unattended, in exceptional circumstances sound waves from sources other than the transmitter can cause changes in the flame height adjustment.

DO NOT install two or more appliances using upgradeable controls in the same room, interference between the remote control frequencies can occur.

Standard Remote Control (PART NUMBER 8455)

- 2.3 This remote control can control the gas appliance after the pilot has been lit. It can turn the main burner on and regulate it from low through to high and back again. It can turn the main burner off leaving the pilot burning.

Thermostatic and Timer Remote Control (PART NUMBER 8456)

- 2.4 This remote control can control the gas appliance after the pilot has been lit.

MANUAL MODE

Can be used to turn the main burner on and manually regulate it from low through to high and back again. It can also be used to turn the main burner off leaving the pilot burning.

AUTO MODE

Will automatically regulate the room to a pre-set temperature.

TIMER MODE

Will turn the appliance on and off according to a pre-set programme and automatically regulate the room temperature during the two on periods.


Installation Instructions

3. Installation of the Appliance




IMPORTANT: THE OUTER PANNELLING OF THE YEOMAN CL IS MADE FROM CAST IRON. USE CAUTION WHEN INSTALLING, REMOVING AND STORING AS THE COMPONENTS ARE HEAVY AND SHOULD BE HANDLED CAREFULLY.

- 3.1 Pull the lower door open from the right hand side to access the controls, see Diagram 1.

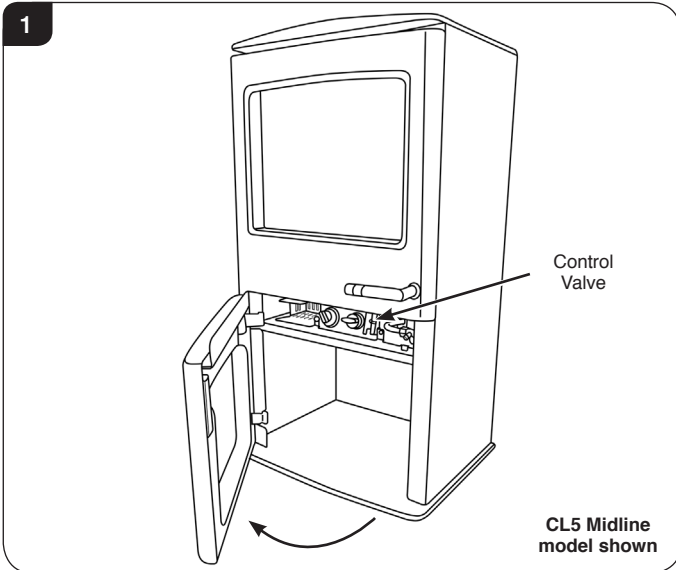


- 3.2 Remove the frame to gain access to the viewing aperture by lifting the hooks clear of the slots on the front of the appliance, see Diagram 2.

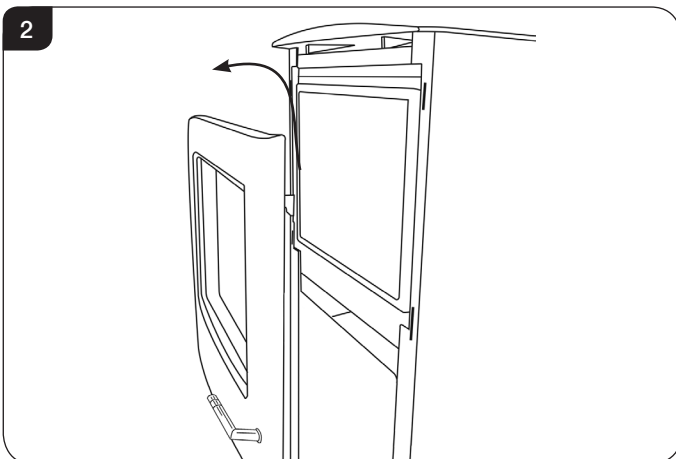

SECURING THE APPLIANCE

The appliance is secured to the floor through 2 fixing holes on the base of the appliance, see Diagram 3.

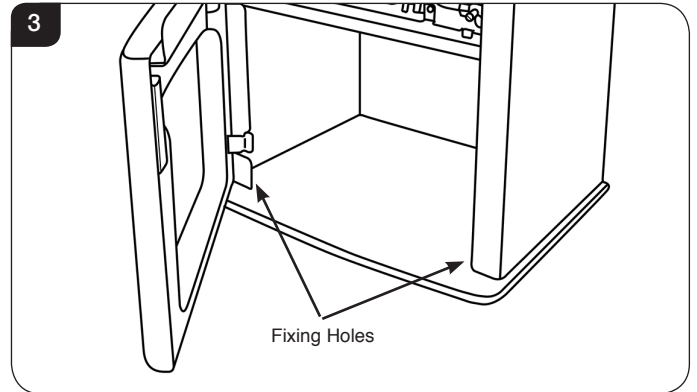

- 3.3 Position the appliance and mark the holes, see Diagram 3.
3.4 Drill the guide holes.
3.5 Position the appliance and secure with the screws and rawl plugs provided.

NOTE: Use the wood screws and rawl plugs in the fixing kit supplied.


4. Fitting the Top Plate

- 4.1 The Yeoman CL has a decorative plate that sits on top of the outer box. Depending on the choice of flue exit this top will have a hole for the flue pipe to pass through or be completely smooth.


The hole will be situated in an off set position to the rear edge of the cast top.
When installing the spigot must be put in place before the cast top is located. Then the connection to the flue can be made.

NOTE: For Top Exit appliances the flue collar must be placed on the flue exit before the top is fitted.


- 4.2 To fit the top line up the raised fins on the underside of the cast top plate with the cut outs in the top of the box, see Diagram 4a & 4b.

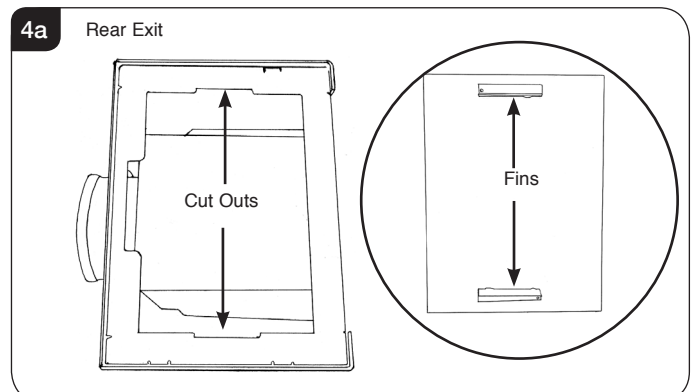

Installation Instructions

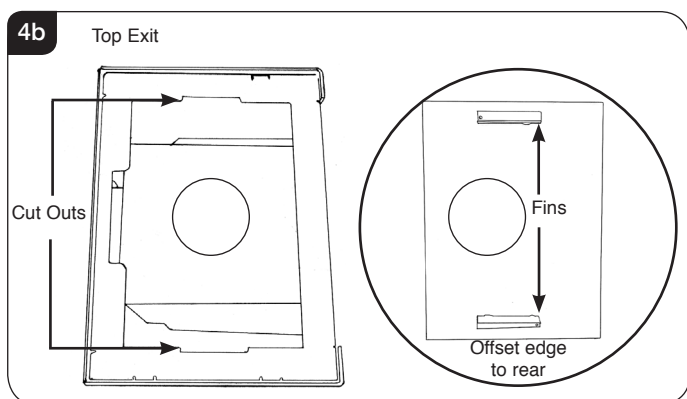

4.3 When properly fitted the rear of the cast top plate should sit flush with the rear of the appliance, see Diagram 5.

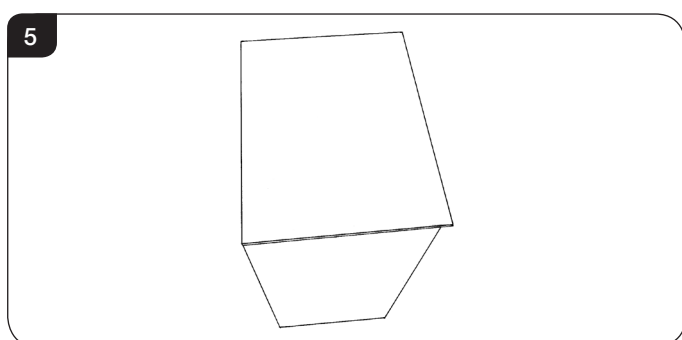


5. Flue Assembly

5.1 Refer to **Site Requirements** page 15 onward.

5A. Rear EXIT - Horizontal flue

Flue Length

- 5.2 Measure the total wall thickness and add 65mm.
- 5.3 The total flue length gives a minimum clearance of 50mm between the rear of the appliance and the wall.
- 5.4 Insert the square cardboard sleeve into the flue to support the inner tube.
- 5.5 Cut through the flue and sleeve, see Diagram 6.

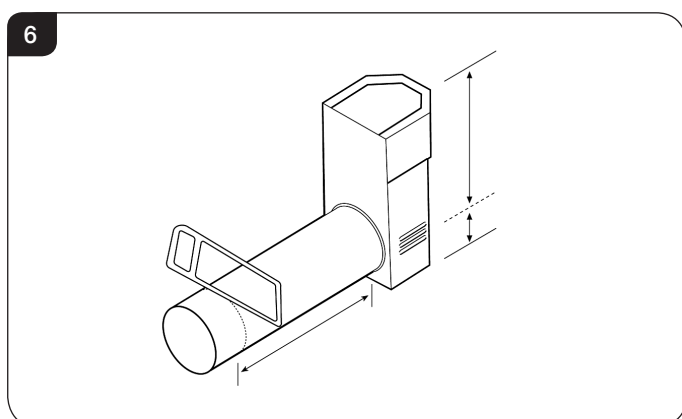

5.6 **REMOVE THE CARDBOARD REMNANTS FROM THE FLUE.**

5.7 File the cut edges smooth.

Terminal


On the outside wall:

- 5.8 Position the flue assembly into the hole. The terminal should be flat against the wall.
- 5.9 Make sure the terminal is vertical, see Diagram 7.
- 5.10 Mark the four fixing holes.
- 5.11 Remove the terminal to drill the holes.
- 5.12 Insert wall plugs supplied.

DO NOT FIX THE FLUE AT THIS STAGE.

Flue and Appliance Fixings

- 5.13 Position the appliance observing appropriate clearances.
- 5.14 Apply a bead of suitable weatherproof sealant (silicone or similar) to perimeter of back face of terminal, see Diagram 7.

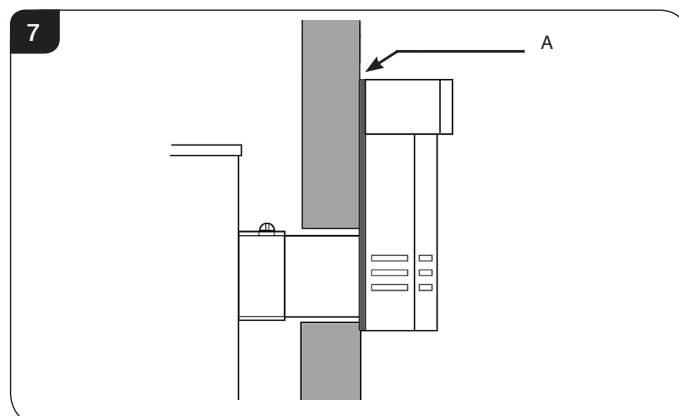

5.15 Feed the flue through the wall, making sure it runs smoothly.


On the inside wall:

- 5.16 Engage the flue in the inner and outer spigots.
- 5.17 Make sure rubber seals on the spigots are not damaged

Installation Instructions

From outside:

- 5.18 Insert four screws in the flanges of the flue terminal.
- 5.19 Check sealant has formed a water-tight joint to the wall.
- 5.20 Any terminal less than 2m above any access (level ground, balcony or flat roof with access) must be fitted with the guard supplied, see Diagram 8.

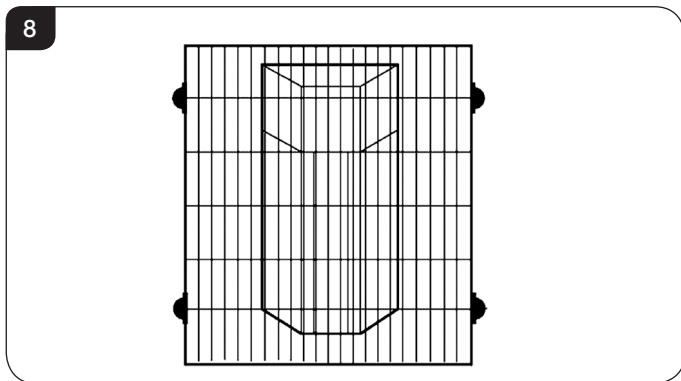

5B. Top Exit - Up & Out

ENSURE THE BLACK DECORATIVE TOP AND COLLAR ARE FITTED TO THE TOP OF THE APPLIANCE PRIOR TO INSTALLATION OF A TOP FLUE EXIT. THIS MUST BE POSITIONED BEFORE INSTALLING THE FLUE.


A restrictor may be required with top exit flues. See Technical Specification on page 12 for restrictor sizes.

Wall Plate

- 5.21 A wall plate is supplied to secure the flue to the inside wall. Bend the securing tab to 90° and slot the plate over the flue before bringing the flue through the wall.
- 5.22 Mark the fixing holes using the wall plate as a template. The tab can be above or beneath the flue, see Diagram 10.

Flue Aperture

- 5.23 Mark the height from the top of the hearth to the centre of the horizontal section, see Diagram 9.

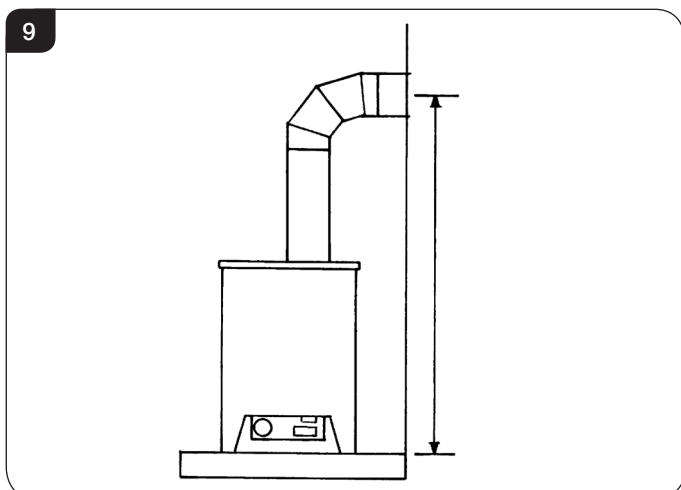

- 5.24 **TAKE CARE TO MARK OUT THE FLUE CORRECTLY. IT IS DIFFICULT TO MOVE AFTER INSTALLATION.**

- 5.25 Create a 152mm (6") diameter hole for the flue using either:
 - a) a core drill, or
 - b) a hammer and chisel

- 5.26 Make good at both ends of the hole.


Flue Length

- 5.27 The final length of the flue pipe includes the terminal. The terminal is the only section that can be shortened.

DO NOT SHORTEN ANY OTHER SECTION OF FLUE PIPE.

- 5.28 Measure from the outside of the wall to the stop on the 90° elbow.


- 5.29 Fit horizontal flue section between the elbow and the terminal at this stage, if required, see Diagram 10.

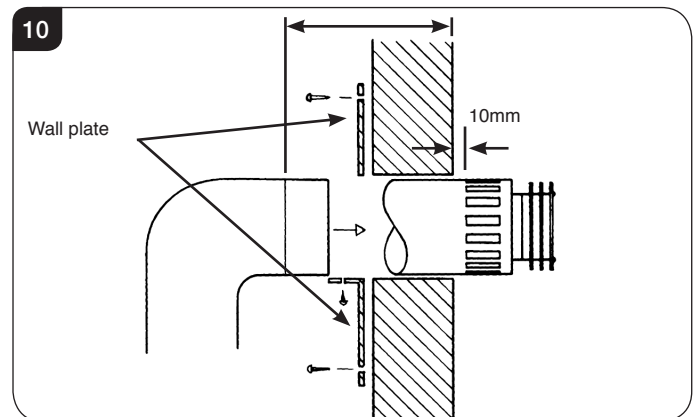

- 5.30 Mark the correct length all the way around the flue terminal section, see Diagram 10.

- 5.31 Insert the square cardboard sleeve into the flue to support the inner tube.

- 5.32 Cut through the flue and sleeve, see Diagram 11.

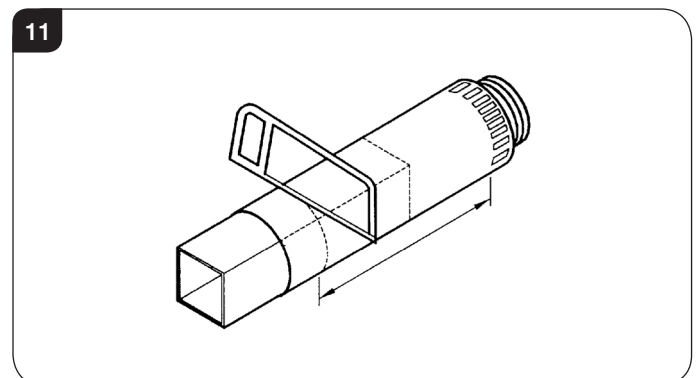

- 5.33 **REMOVE THE CARDBOARD REMNANTS FROM THE FLUE.**

- 5.34 File the cut edge smooth.

Installation Instructions

Flue and Appliance Fixings


- 5.35 Pull appliance and flue assembly away from the hearth.
- 5.36 Drill four fixing holes for the wall plate and insert wall plugs supplied.
- 5.37 Put the horizontal flue onto the elbow and reposition the appliance.
- 5.38 Check the flue runs smoothly through the wall.
- 5.39 Fix the wall plate to the wall using the four black screws provided.
- 5.40 Drill through the fixing tab of the wall plate using a 3.5mm drill.
- 5.41 Secure with the screw provided.
- 5.42 Make good and weatherproof around the outside of the flue.

5C. Top Exit – Vertical Flue

- 5.43 Where a vertical only flue system has been purchased, refer to Installation & Instructions, Site Requirements, Section 3D.
- 5.44 Pay careful attention to the following:
 - Terminal positions
 - Flue supports
 - Weatherproofing
 - Fire precautions
- 5.45 Local and national codes of practice must be followed for all the above.
- 5.46 **A restrictor must be fitted with vertical flues. See Technical Specification on page 13 for restrictor sizes.**

PLEASE NOTE: When installing the appliance in conjunction with a vertical termination kit, there is a unique kit for use with this appliance (Yeoman Part No. 999-539). This kit differs in that it has restrictors with sliding plates. Please ensure you have the correct kit before proceeding with the installation.


- 5.47 It is important that the sliding restrictor assembly is used. The restrictor assembly must be fitted with the slide collars uppermost and the top restrictor plate must be checked to ensure it moves freely before the flue is fitted.

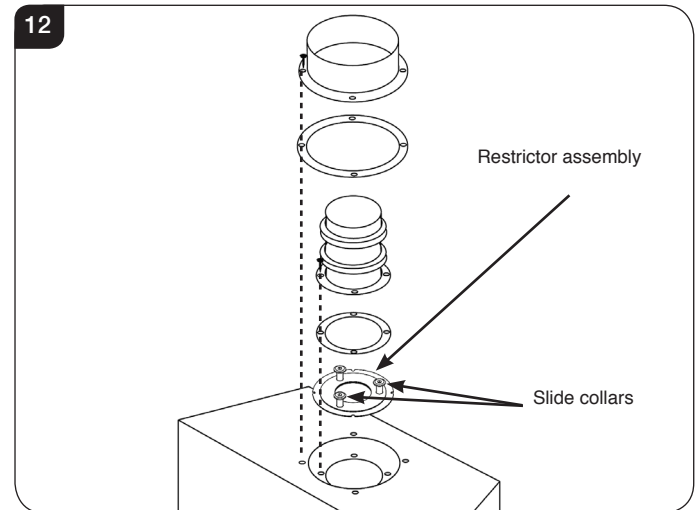

- 5.48 **Flue Lengths over 5m (Top Exit)**

In the instance where the flue pipe meets the above criteria a 40mm Ø restrictor must be fitted. This restrictor can be found in the appliance packing kit supplied.

- 5.49 To fit the restrictor undo the bolts on the slide collars on the restrictor assembly, see Diagram 13.

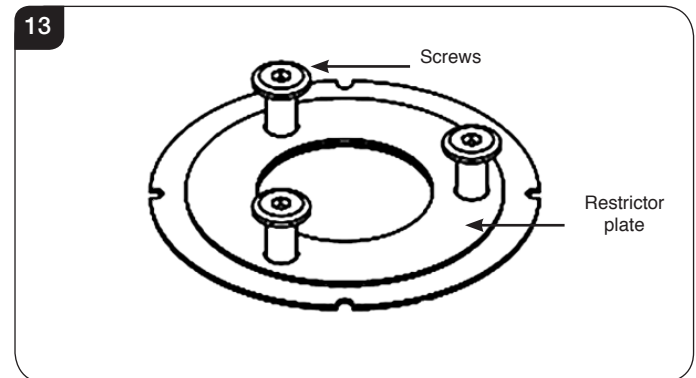


- 5.50 Remove the restrictor plate that is current in place and fit the 40mm Ø one from the kit. Secure with the screws and ensure that the plate moves freely up and down on the slide collars.
- 5.51 Fit the restrictor assembly as previously described.

Installation Instructions

6. Gas Soundness Pressure Check

This is essential to expel any debris that may block the gas controls.


- 6.1 Connect the gas to the 8mm elbow on the rear of the appliance, see Diagram 14.

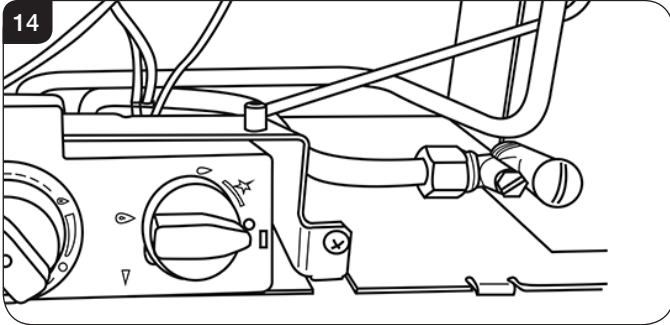

- 6.2 Connect a suitable pressure gauge to the test point located on the inlet fitting and turn the gas supply on. Light the appliance and check all gas joints for possible leaks. Turn the appliance to maximum and check that the supply pressure is as stated on the databadge. Turn the gas off and replace the test point screw, turn the gas on and check the test point for leaks.

7. Removing the Glass

- 7.1 Using screwdriver remove the eight screws securing the window panel to the appliance, see Diagram 15. Take care to support the glass when removing the screws.

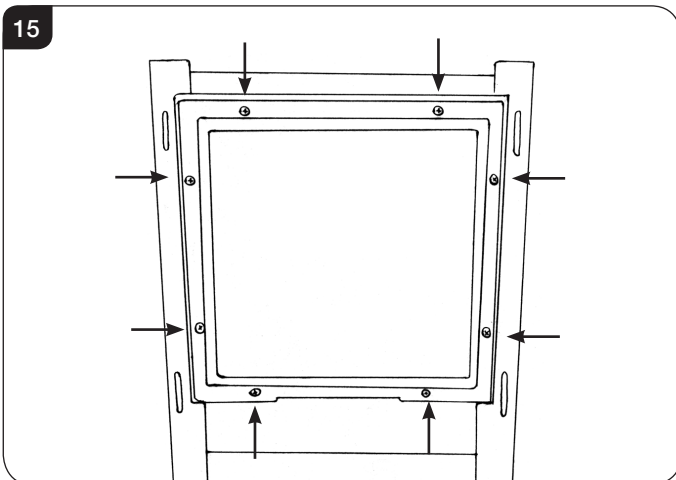

8. Arrangement of the Fuel Bed

Advice on handling and disposal of fire ceramics



The fuel effect of the log version of this appliance is made from Refractory Ceramic Fibre (RCF), a material which is commonly used for this application.

Protective clothing is not required when handling these articles, but we recommend you follow normal hygiene rules of not smoking, eating or drinking in the work area and always wash your hands before eating or drinking.

To ensure that the release of RCF fibres are kept to a minimum, during installation and servicing a HEPA filtered vacuum is recommended to remove any dust accumulated in and around the appliance before and after working on it. When servicing the appliance it is recommended that the replaced items are not broken up, but are sealed within heavy duty polythene bags and labelled as RCF waste.


RCF waste is classed as stable, non-reactive hazardous waste and may be disposed of at a licensed landfill site.

Excessive exposure to these materials may cause temporary irritation to eyes, skin and respiratory tract; wash hands thoroughly after handling the material.

9. Log Layout

LOGS MUST BE POSITIONED ACCORDING TO THE FOLLOWING INSTRUCTIONS TO GIVE THE CORRECT FLAME EFFECT


- 9.1 Ensure the burner tray is clean and free from any debris, see Diagram 16.

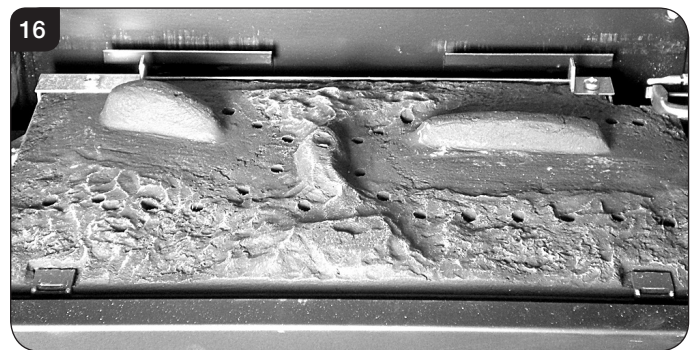


The three logs that make up the fuel bed are visually distinct and fit into specific parts on the burner tray.

Installation Instructions


- 9.2 Place the rear log into position between the rear brackets and pushed up against the back panel as illustrated in Diagram 17.

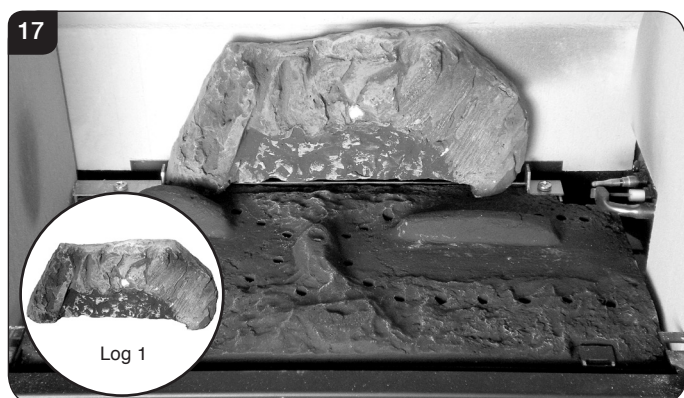


- 9.3 Place the second log into the left hand groove on the burner tray, see Diagram 18. The log should butt up against the raised molding and the left hand side liner.

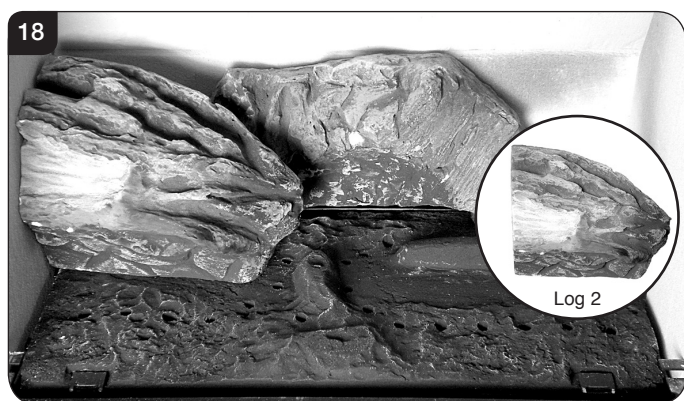


- 9.4 Place the third log into the groove on the right hand side, see Diagram 19. The log should butt up against the raised molding and the right hand side liner.

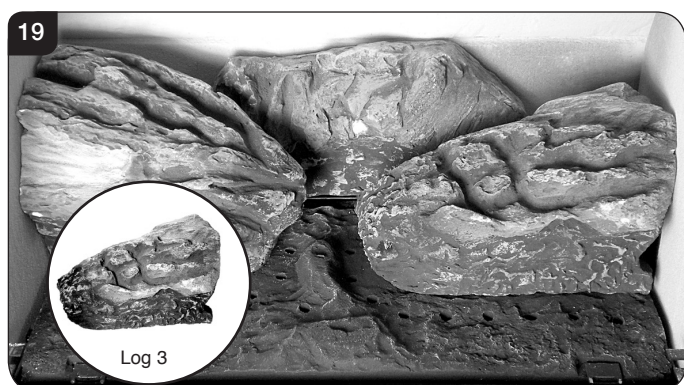


- 9.5 Once the logs are in there are two embers which can be loosely placed at the front of the fire bed and cover the tabs securing the burner tray, see Diagram 20.

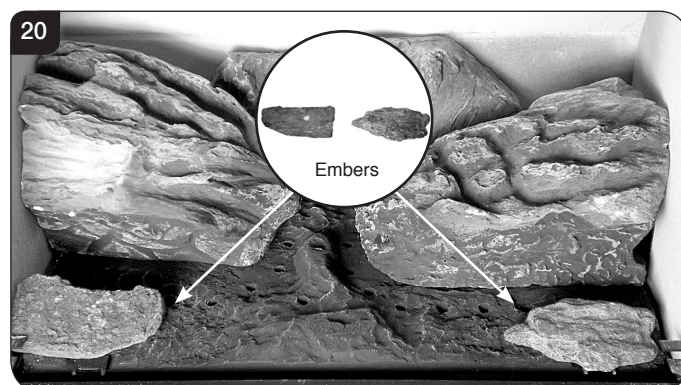

- 9.6 Sparingly spread an amount of the Embaglow fibres provided, covering the ports in the burner tray, see Diagram 21. **It is essential to cover the port in the middle of the burner tray in order to get the most visually appealing flame picture.** Take care not to use more than half a packet per application. **WARNING - DO NOT PLACE NEAR THE PILOT AREA.**

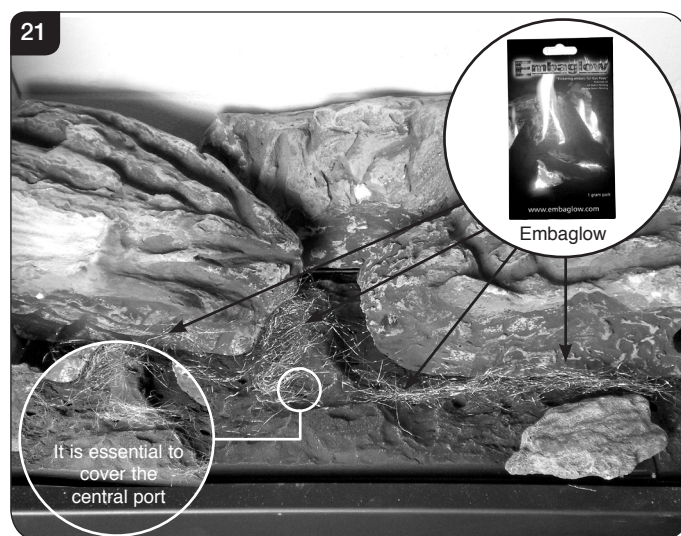

- 9.7 Fix log guard into position, see Diagram 22.

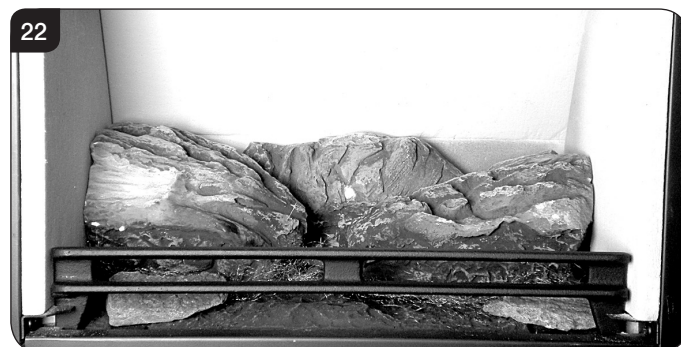


Installation Instructions

10. Completion of Assembly

10.1 To fit the glass frame:

Offer the frame to the foot of the opening and secure using 8 screws as shown, see Diagram 23.

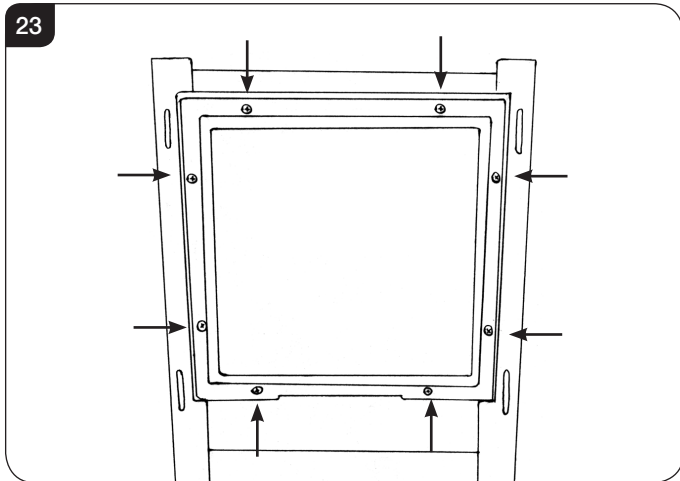


10.2 Replace ALL of the glass frame securing screws ensuring that a screw is present in all fixing slots.




UNDER NO CIRCUMSTANCES SHOULD THE APPLIANCE BE USED IF ANY OF THE GLASS FRAME RETAINING SCREWS ARE LOOSE OR MISSING.

10.3 Fit the front by inserting the hooks on the back of the frame into the slots on the front of the appliance, see Diagram 24.

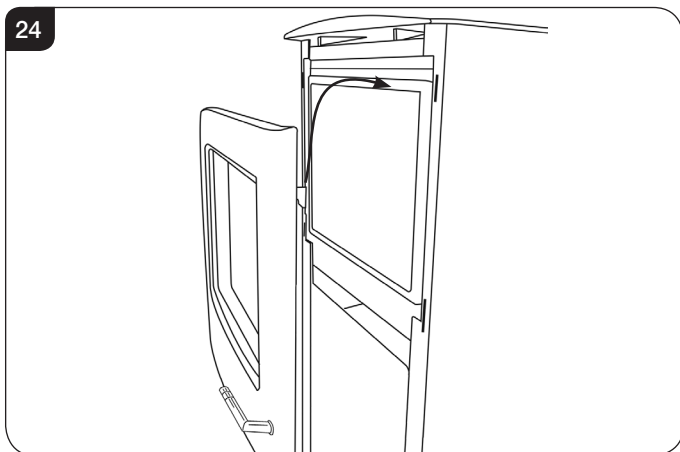


10.4 Push the lower door closed, see Diagram 25.

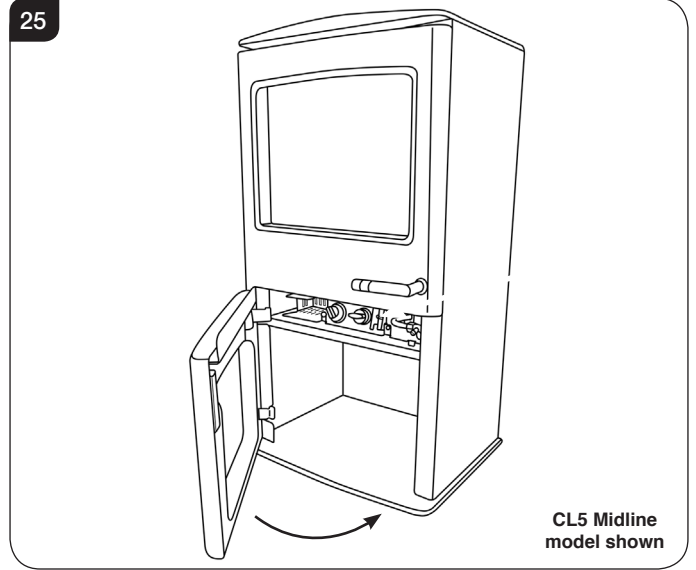

11. Operating the Appliance

The control valve is located behind the plinth.


11.1 Pull the lower door open from the right hand side to access the controls, see Diagram 26.

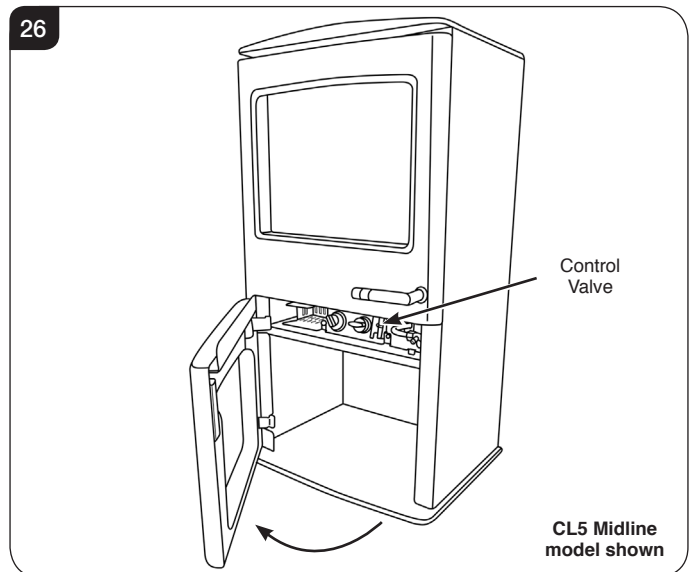

Installation Instructions

The valve has two controls, see Diagram 27.

1. The right-hand knob controls the pilot ignition.
2. The left-hand knob controls the main burner.

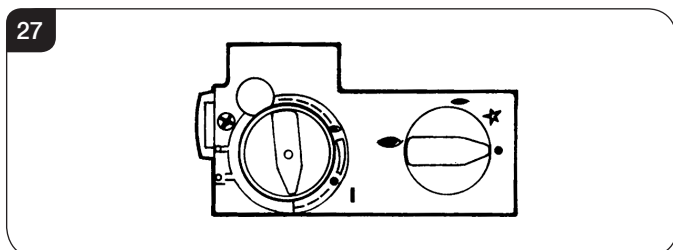

- 11.2 Refer to separate instructions if your appliance is upgraded to include battery remote control. The instructions below apply whether or not you have the remote upgrade.

Lighting the Pilot

- 11.3 To start the left-hand and right-hand control knobs must both point to off (●):

- 11.4 Press in the right-hand control knob and rotate anti-clockwise until a click is heard. Continue to press in. The knob points to the pilot (←).

The pilot is lit.

- 11.5 Keep the knob depressed for 10 seconds before releasing. The pilot remains lit.

Repeat the above steps if the pilot does not stay lit.

NOTE: If the pilot goes out, the Interlock system prevents you lighting again for a short period.

- 11.6 If, after repeating the above steps the pilot does not light, contact your Retailer or Installer.
- 11.7 Turn the right-hand knob to the left to main burner setting (↶).

Adjusting the Flame height

- 11.8 You can now adjust the flame height and temperature using the left-hand control knob.
- 11.9 Turn the left-hand knob anti-clockwise to increase the flame height.
- 11.10 Turn clockwise to decrease the height.

i **IMPORTANT: YELLOW FLAMES TYPICALLY APPEAR WHEN THE APPLIANCE HAS REACHED NORMAL OPERATING TEMPERATURE. THIS CAN TAKE UP TO 30 MINUTES.**

! **WARNING: IF THE APPLIANCE FAILS TO LIGHT OR BECOMES EXTINGUISHED IN USE, WAIT 3 MINUTES BEFORE ATTEMPTING TO RELIGHT.**

Commissioning

1. Commissioning

- 1.1 Complete the Commissioning Checklist at the front of this manual covering:
 - Thermocouple soundness checks.
This is to include ensuring the thermocouple is secure on the pilot bracket assembly, lead connection and integrity.
 - Flue checks
 - Gas checks
 - Log/fuel effect layout - flame picture
- 1.2 Ensure all safety checks listed in the Commissioning Section are completed, paying particular attention to the glass panel checks and securing of the glass frame.
- 1.3 Upon completion of the commissioning and testing of the installation and correct operation of the appliance, the installer must instruct the user how to operate the appliance.
- 1.4 Guide the user through the User Instructions paying particular attention to:
 - a) Regular servicing (Section 10 of the User Instructions).
 - b) Ventilation (Section 11 of the User Instructions) - point out the ventilation positions where applicable.
 - c) Hot surfaces (Section 13 of the User Instructions).

Servicing Instructions

Servicing/Fault Finding Charts

1. Servicing Requirements

IMPORTANT – The glass panel on this appliance should be checked for any signs of damage on the front face of the glass panel (scratches, scores, cracks or other surface defects). If damage is observed, the glass panel must be replaced and the appliance must not be used until a replacement is installed. Under no circumstances should the appliance be used if any damage is observed. Please isolate the appliance until a replacement glass panel has been obtained and installed. Replacement glass panels can be purchased from Yeoman via the retailer from which the appliance was purchased or any other Yeoman distributor.

This appliance must be serviced at least once a year by a competent person.

All tests must be carried out in accordance with the current GasSafe recommendations.

1.1 Before Testing:

- Conduct a gas soundness test for the property ensuring there are no leaks before servicing.
- Check the operation of the appliance before testing.


1.2 Special checks:

- Clean the burner using a vacuum cleaner with a soft brush attachment. Ensure all debris is removed from the burner ports.
- Clean away lint or fluff from the pilot.
- Clean away lint or fluff from under the burner.
- Check the spark gap on the pilot is correct.
- Ensure that the glass frame is secured correctly and that all retaining screws are in place.


1.3 Correct any faults found during the initial test.

1.4 Re-commission the appliance in accordance with Commissioning Procedures.

1.5 Advise the customer of any remedial work undertaken.

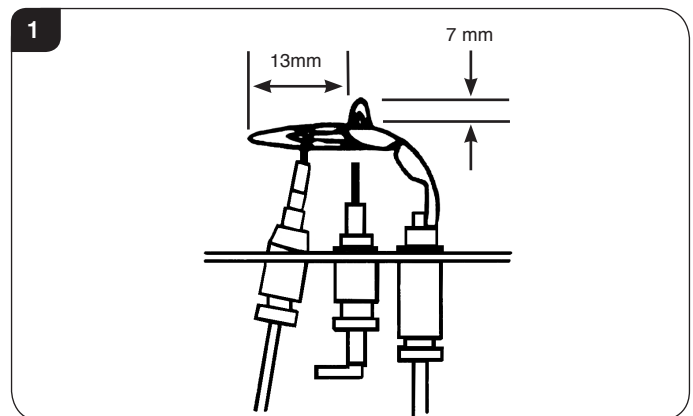


IGNITION FUNCTIONAL CHECK 1

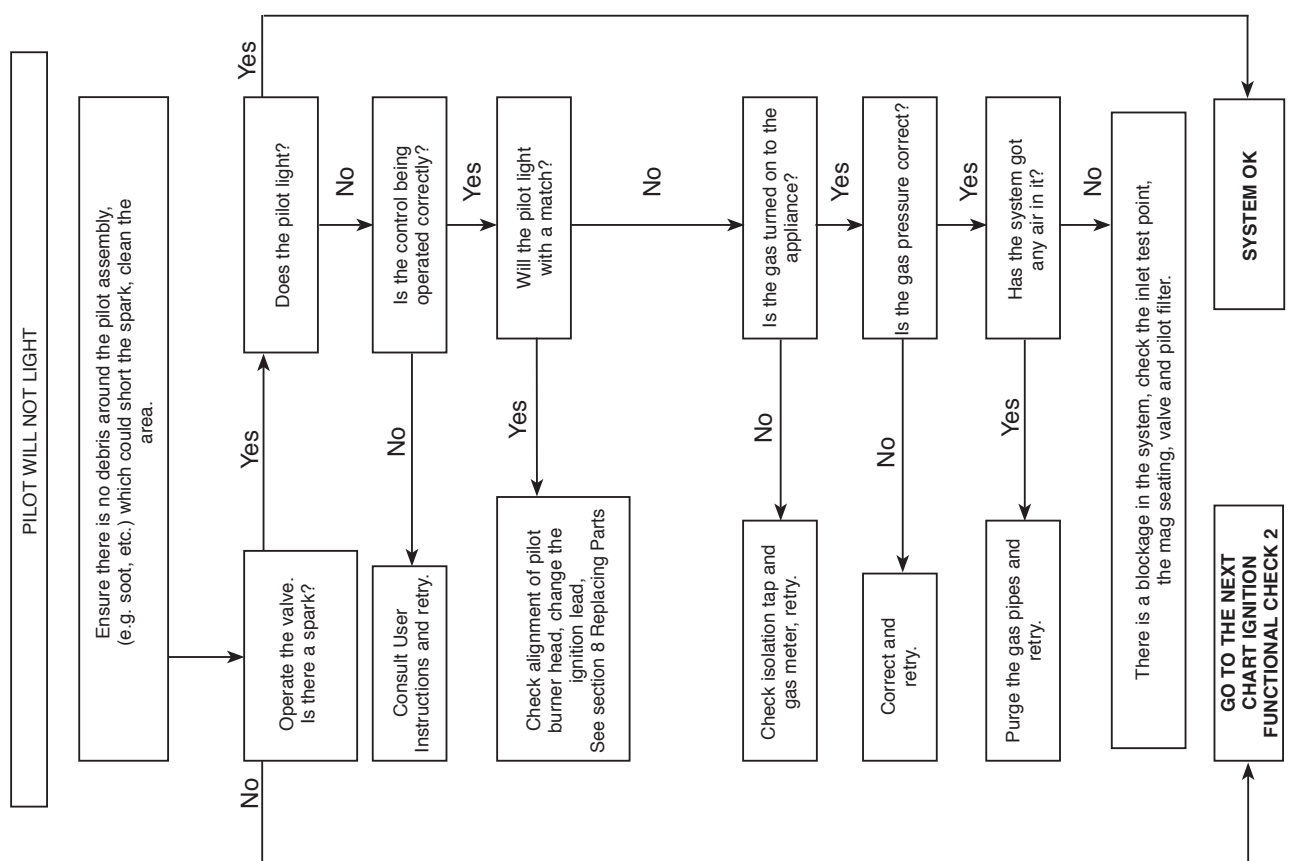


Servicing Instructions

Fault Finding Charts

FLAME FAILURE FUNCTIONAL CHECK 3

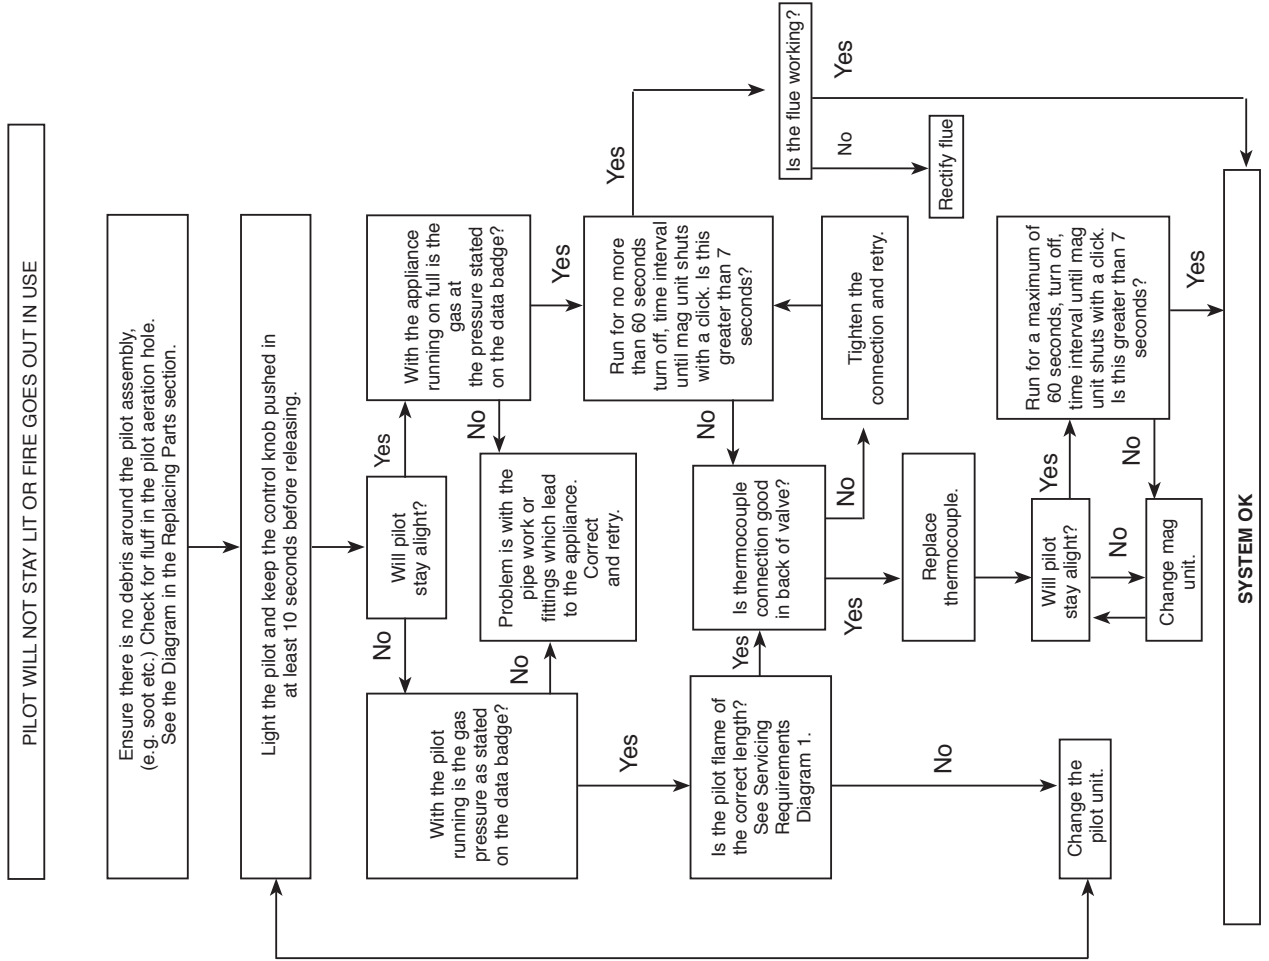

IGNITION FUNCTIONAL CHECK 2

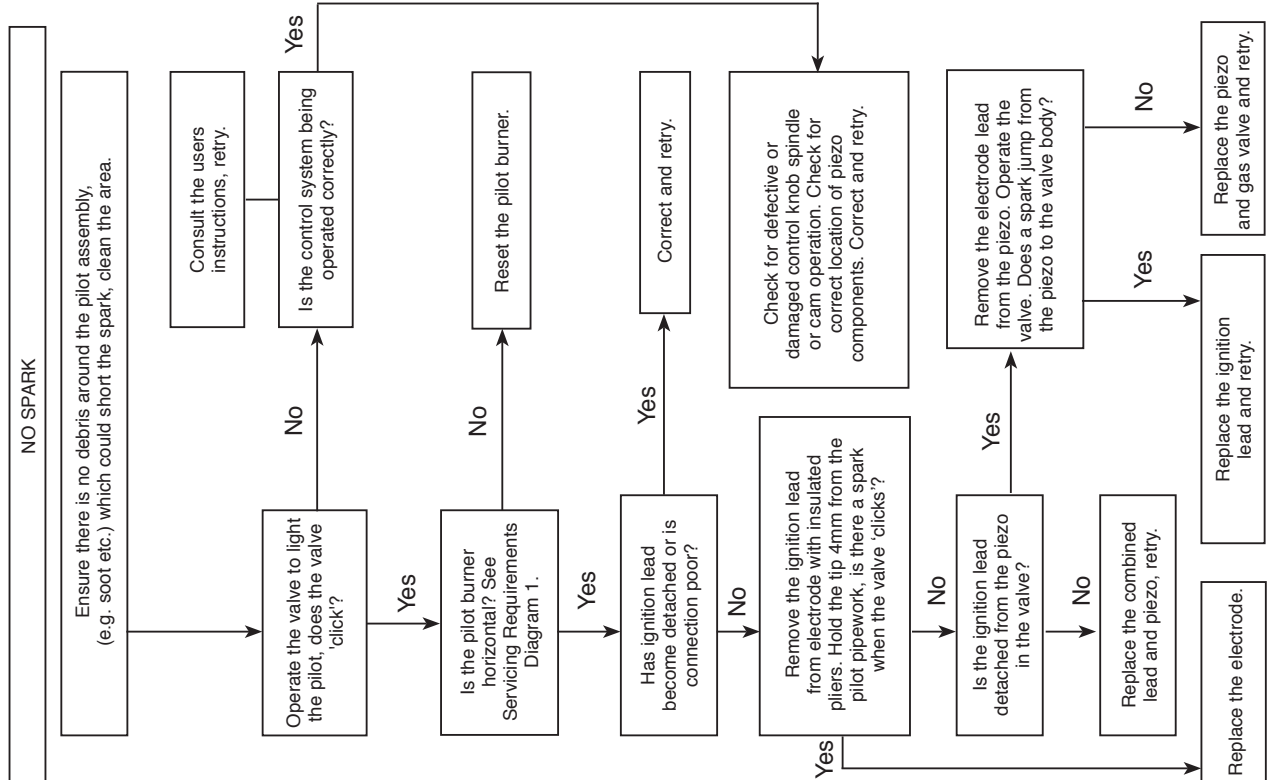

Servicing Instructions - Replacing Parts

1. General

1.1 All main components can be replaced without removing the appliance from its installation.

1.2 Ensure the appliance and surrounds are cool before servicing.

IT IS ESSENTIAL THAT THE GAS SUPPLY TO THE APPLIANCE IS TURNED OFF AT THE ISOLATION DEVICE BEFORE PROCEEDING FURTHER.


1.3 **Removal of Flue**
If, for any reason, the flue has to be removed from the appliance, the seal must be replaced in the inner spigot.

2. Decorative Front




IMPORTANT: THE OUTER PANNELLING OF THE YEOMAN CL IS MADE FROM CAST IRON. USE CAUTION WHEN INSTALLING, REMOVING AND STORING AS THE COMPONENTS ARE HEAVY AND SHOULD BE HANDLED CAREFULLY.

2.1 Pull the lower door open from the right hand side to access the controls, see Diagram 1.

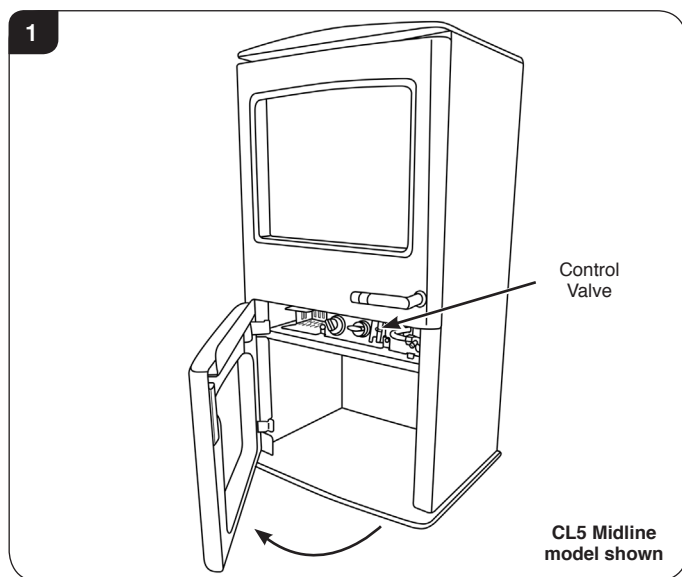


2.2 Remove the frame to gain access to the viewing aperture by lifting the hooks clear of the slots on the front of the appliance, see Diagram 2.

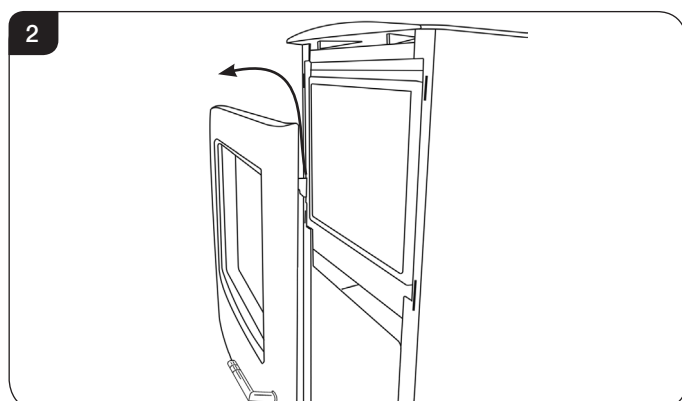

3. Window Frame Assembly

3.1 Using screwdriver remove the 8 screws securing the window panel to the appliance, see Diagram 3. Take care to support the glass when removing the screws.

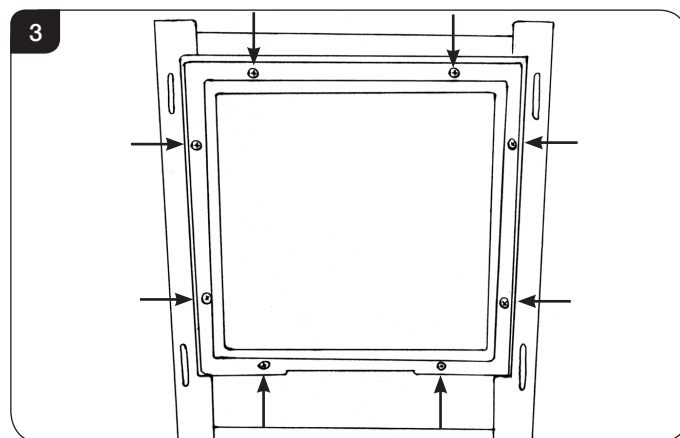

3.2 Place carefully to one side.

3.3 The glass frame must be refitted to the appliance following cleaning or servicing. Hold in position and secure with the screws.

3.4 Replace ALL of the securing screws ensuring that a screw is present in all fixing slots.



UNDER NO CIRCUMSTANCES SHOULD THE APPLIANCE BE USED IF ANY OF THE GLASS FRAME RETAINING SCREWS ARE LOOSE OR MISSING.

4. Baffle & Ceramic Liners


To access the burner tray and interior workings of the appliance it may be necessary to remove the baffle and the liners.

BAFFLE

The baffle must be removed before the liners can be taken out of the appliance.

4.1 Remove the log guard.

4.2 To do this undo the two screws securing it to the roof of the firebox, see Diagram 4.

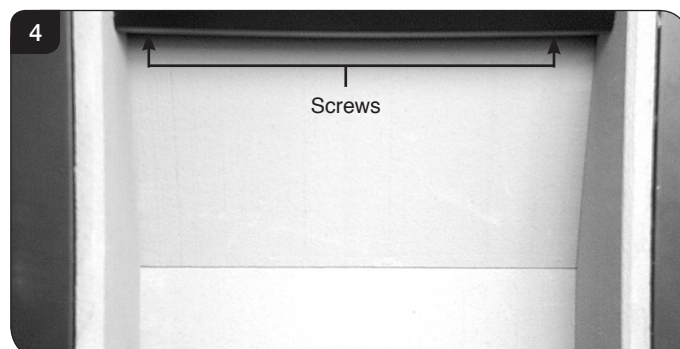

4.3 The baffle can now be removed through the front of the appliance.

Servicing Instructions - Replacing Parts

CERAMIC LINERS


Once the baffle has been placed carefully to one side the liners can then be taken out in the following order.

- 4.4 To remove the Left Hand liner first tilt inwards towards the centre of the firebox before lifting up and pulling out through the front of the firebox, see Diagram 5.




- 4.5 To remove the Right Hand liner first tilt inwards towards the centre of the firebox before lifting up and pulling out through the front of the firebox, see Diagram 5.


The two side liners also support the raised rear liner. Taking out the side liners will allow the rear liner to drop down so ensure it is supported and removed carefully, see Diagram 6.

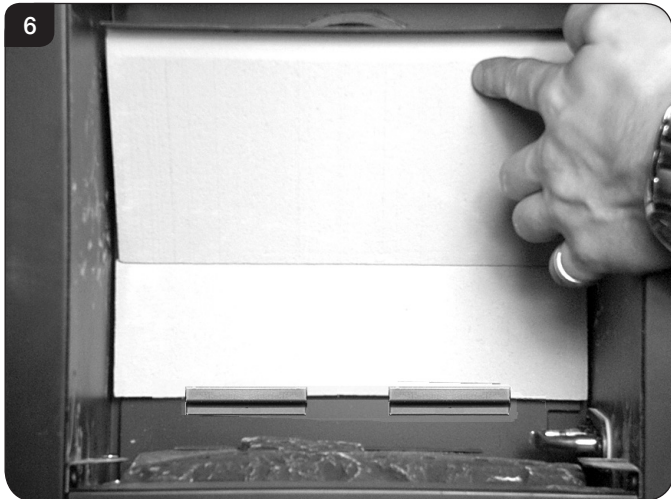

- 4.6 The lower rear liner does not need to be removed from the bracket in order to access the burner tray for maintenance, but can be lifted off in order to clean or replace, see Diagram 7.

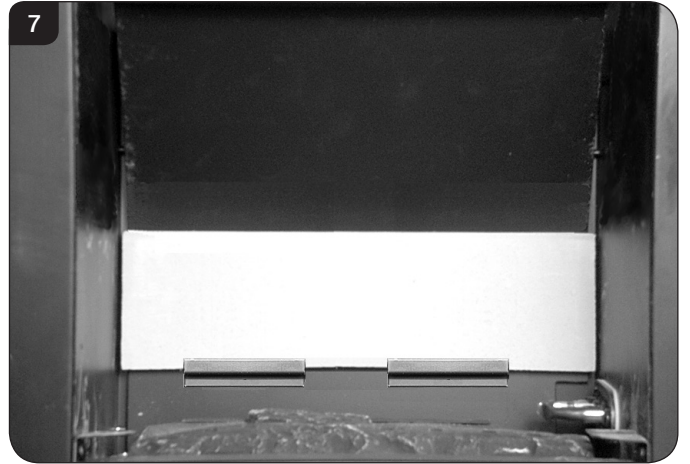

- 4.7 With the liners and baffle removed the firebox is clear for cleaning and maintenance, see Diagram 8.

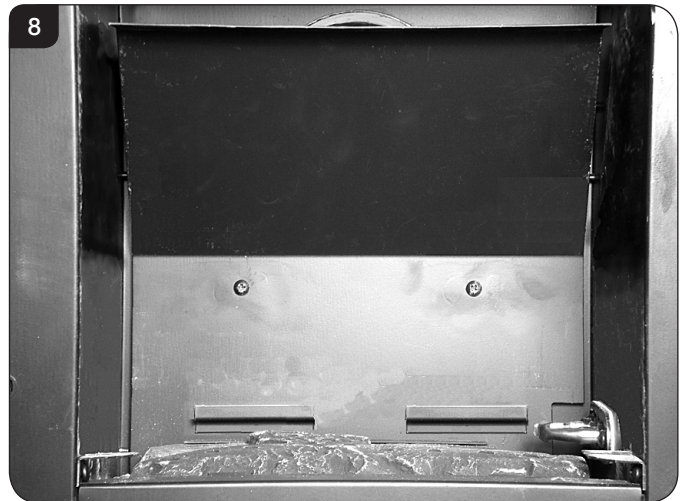


- 4.8 To replace the liners and baffle reverse these procedures.

Servicing Instructions - Replacing Parts


5. Main Burner

To replace the main burner:

- 5.1 Remove the baffle and ceramic liners, see Section 4.
- 5.2 Remove the burner bracket screw on the left hand side of the firebox, Diagram 9.
- 5.3 Remove the 3 securing screws from the edges of the burner, see Diagram 9.

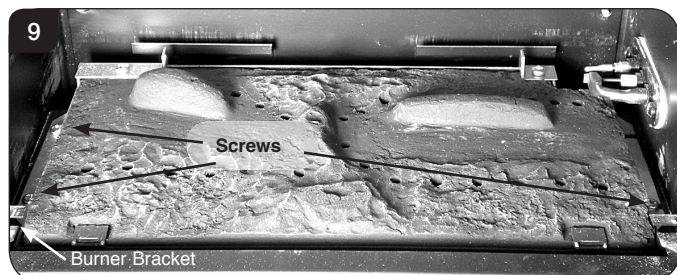

- 5.4 Slide the burner fully to the right whilst lifting the Left Hand side clear of the bracket, see Diagram 10.

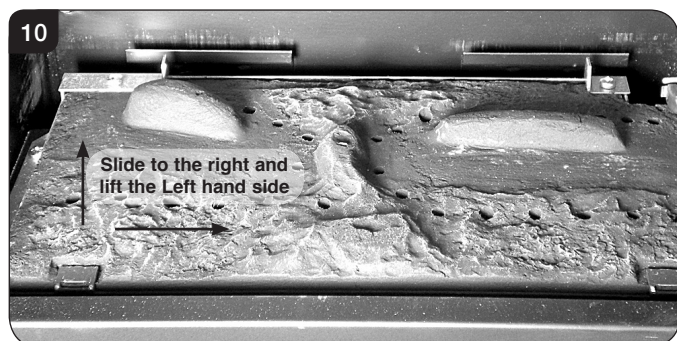

- 5.5 Slide the burner back to the left and out of its location. **IMPORTANT: Take care when removing the burner not to damage the ceramic pad with the pilot unit attached.**

Refit in reverse order.

6. Control Assembly

- 6.1 It is not necessary to remove the complete control assembly to service or replace parts of this appliance. The following sections will detail how to individually remove and replace each element.

7. Pilot Unit

The pilot assembly consists of five components, which can be individually changed, these are:

- Pilot burner bracket.
- Pilot Injector
- Electrode
- Thermocouple.
- Gasket.




IMPORTANT: UNDER THE TERMS OF THE EXTENDED WARRANTY IT WILL BE COMPULSORY TO CHANGE THE COMPLETE PILOT UNIT ON THIS APPLIANCE IN YEARS 2 AND 4.

- 7.1 Turn the gas supply off at the isolation device, remove the door and place to one side, carefully remove the ceramic fuel bed components.

Pilot Burner Bracket


- 7.2 Remove the two fixing screws from the pilot bracket, see Diagram 11. Gently draw the assemble away from the firebox to give access to the nuts and ignition lead.

NOTE: TAKE CARE NOT TO DAMAGE THE GASKET.

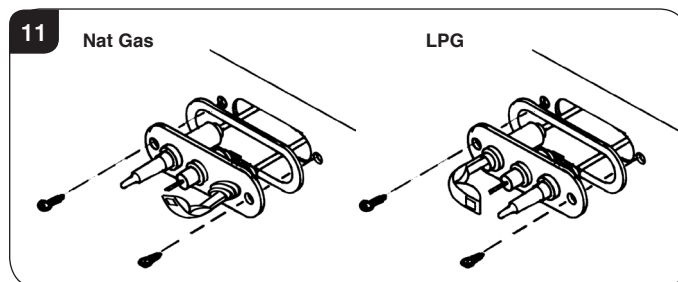

Pilot Injector


- 7.3 Undo the compression nut on the pilot feed pipe and withdraw the injector which will be hooked onto the olive. When replacing an injector always make sure it is hooked onto the olive before inserting it into the pilot burner. see Diagram 12.

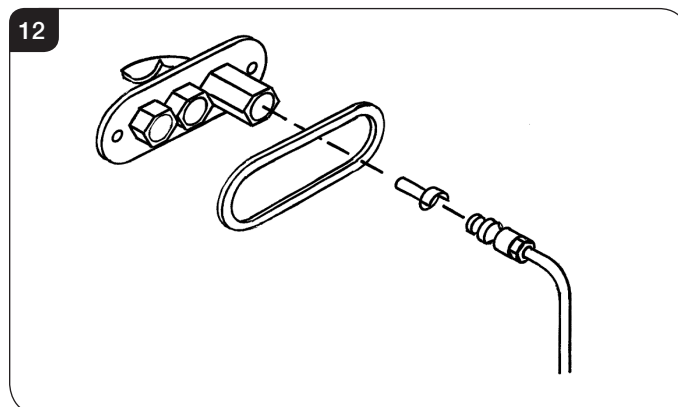

Servicing Instructions - Replacing Parts


Electrode

- 7.4 Disconnect the ignition lead and undo the retaining nut. The electrode can now be removed, note the orientation of the electrode terminal when reassembling, see Diagram 13.

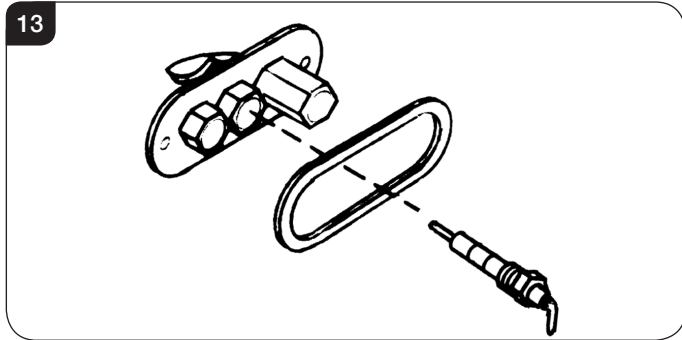

Thermocouple

- 7.5 Undo the retaining nut and withdraw the thermocouple. Undo the thermocouple from the back of the gas valve, see Diagram 14. Reassemble in reverse order. Do not overtighten.

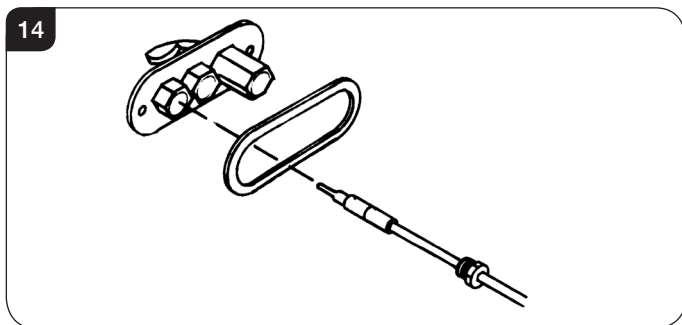



Gasket

- 7.6 Disconnect all the above components and withdraw the gasket. If it is damaged, replace with a new item. Always replace the gasket first when reassembling the pilot components.

8. Ignition Lead

- 8.1 Follow the Pilot Unit instruction to access the back of the pilot assembly.
8.2 Disconnect the ignition lead from the electrode.
8.3 Remove the front cover from the control valve by removing the retaining screw, see Diagram 15 and gently levering clear with flat bladed screwdriver, see Diagram 16.

NOTE: There is a small cylindrical metal spacer inside the cover, this must be kept and replaced on the fixing screw on re-assembly

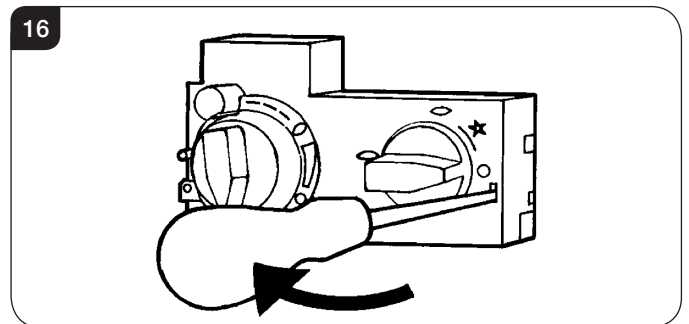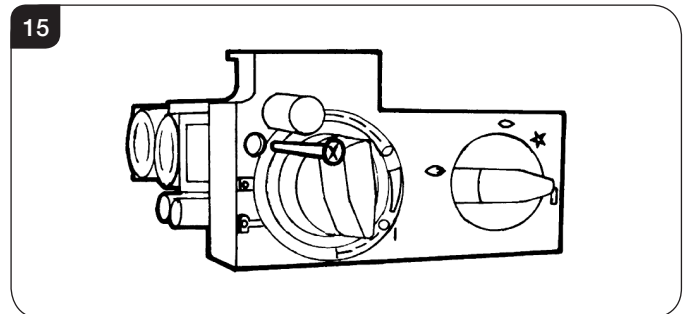

- 8.4 Disconnect the other end of the ignition lead from the valve body noting the route of the ignition lead.
8.5 Replace with a new ignition lead following the same route as the old one.
Replace the valve cover and the pilot assembly.
8.6 Check operation of the new ignition lead.


9. Piezo

- 9.1 The piezo assembly used on this appliance is not serviceable and is not likely to fail.
9.2 If a new piezo is required it will be necessary to change the valve, see Section 10.


Servicing Instructions - Replacing Parts

10. Gas Valve

- 10.1 To remove the valve turn off the gas supply at the isolation device.
- 10.2 Remove the main burner, see Section 5.
- 10.3 From inside the firebox remove the locknut from the injector, see Section 12.
- 10.4 Remove the pilot feed pipe from the pilot unit, see Section 7.
- 10.5 Remove the 2 screws at the front of the valve bracket, see Diagram 17.

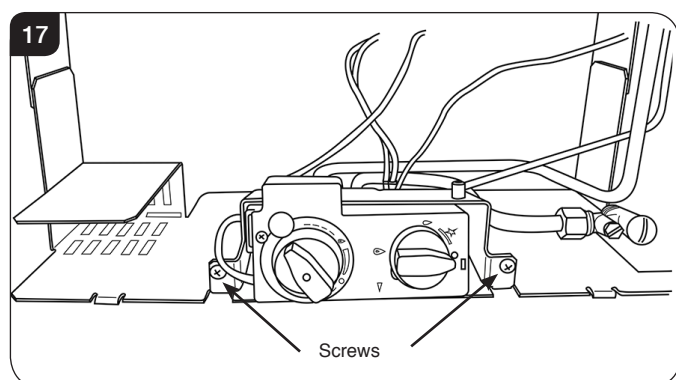


- 10.6 Slide the bracket slightly to the right and pull forward to access the valve connections.
- 10.7 Disconnect the 2 x 8mm and 1 x 4mm gas pipe fittings at the back of the gas valve, see Diagram 18 (A).
- 10.8 Disconnect the thermocouple, see Diagram 18 (B).

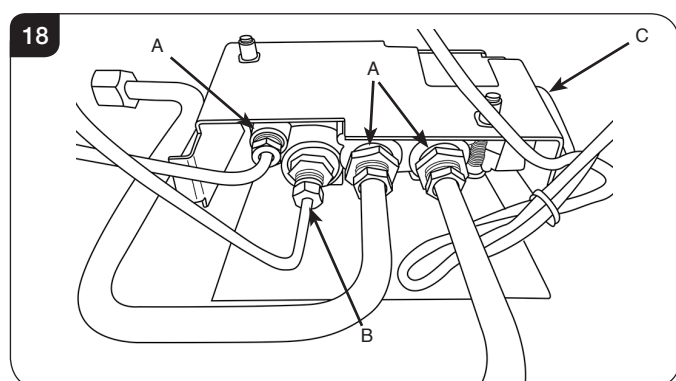

- 10.9 Disconnect the ignition lead from the gas valve, see Diagram 18 (C)
- 10.10 Remove the cover, see Section 8.3.
- 10.11 Undo the 2 screws securing the gas valve to the appliance and remove the valve.
- 10.12 Replace in reverse order.
- 10.13 Check all joints for gas leaks and check operation of the thermocouple and ignition lead.

11. Magnetic Safety Valve


- 11.1 Turn the gas supply off at the isolation device.
- 11.2 Undo the thermocouple connection from the back of the gas valve, Diagram 19 (A).
- 11.3 Undo the magnetic valve-retaining nut from the back of the control valve, see Diagram 19 (B).
- 11.4 Gently tap out the magnetic valve and replace with a new unit.
- 11.5 Replace the retaining nut and tighten.

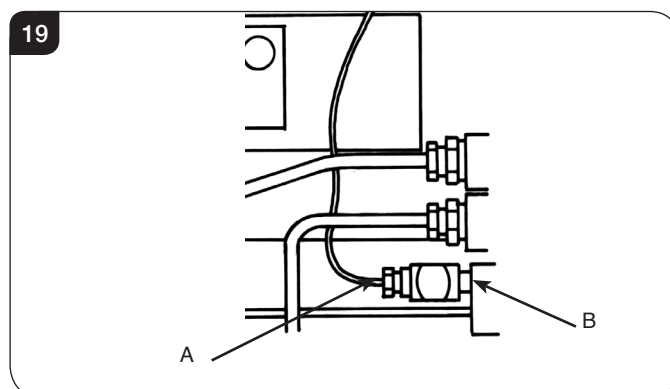

- 11.6 Secure the thermocouple connection in the rear of the gas control. (Do not overtighten).
- 11.7 Turn the gas supply on and check the entire pipework and valve joints for any leaks.

12. Main Injector

- 12.1 To remove the main injector turn off the gas supply at the isolation device.
- 12.2 Remove the main burner, see Section 5.
- 12.3 Undo the compression nut from the feed pipe at the gas control under the appliance.
- 12.4 Working from inside the firebox remove the lock nut from the injector, see Diagram 20.

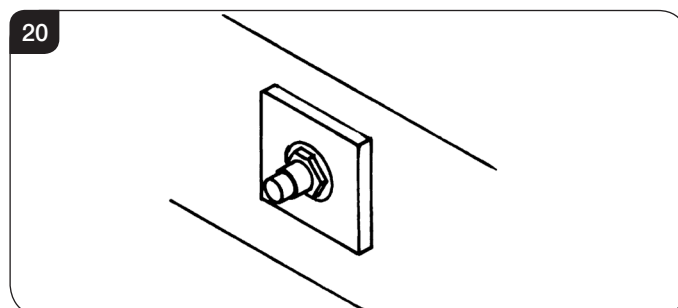

- 12.5 Extract the injector with the feed pipe from beneath the appliance.
- 12.6 Holding the injector with a spanner:
- 12.7 Undo the feed pipe. **Note the orientation of the Injector.**


Servicing Instructions - Replacing Parts

- 12.8 Re-assemble in reverse order.
- 12.9 Turn on the gas supply and check for leaks.

13. Primary Aeration Plate

NOTE: Not all models have aeration plates. Please refer to the Technical Specification.

- 13.1 To replace the primary aeration plate turn off the gas supply at the isolation device.
- 13.2 Remove the burner, as described in Installation Instructions, Replacing Parts, Section 5.
- 13.3 Remove the fixing screw and slide the plate off the venturi.
- 13.4 Replace with the correct size plate and secure with the screw. Ensure the lower edge of the plate is located over the venturi flange, see Diagram 21.

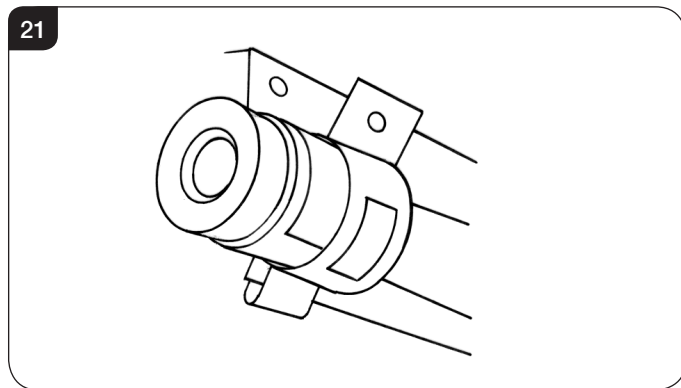

- 13.5 Reassemble in reverse order.
NOTE: Even if no aeration plate is required, the small screw must be replaced.

14. Changing Between Gas Types


In order to change between gas types, it will be necessary to replace the appliance engine. This should be done by factory conversion only.

If a change in Gas Type is required please contact Yeoman and arrange to return the appliance for conversion.

15. Control Upgrade

See Installation Instructions, Section 2.

16. Spare Parts List - Midline & Highline - Top Exit

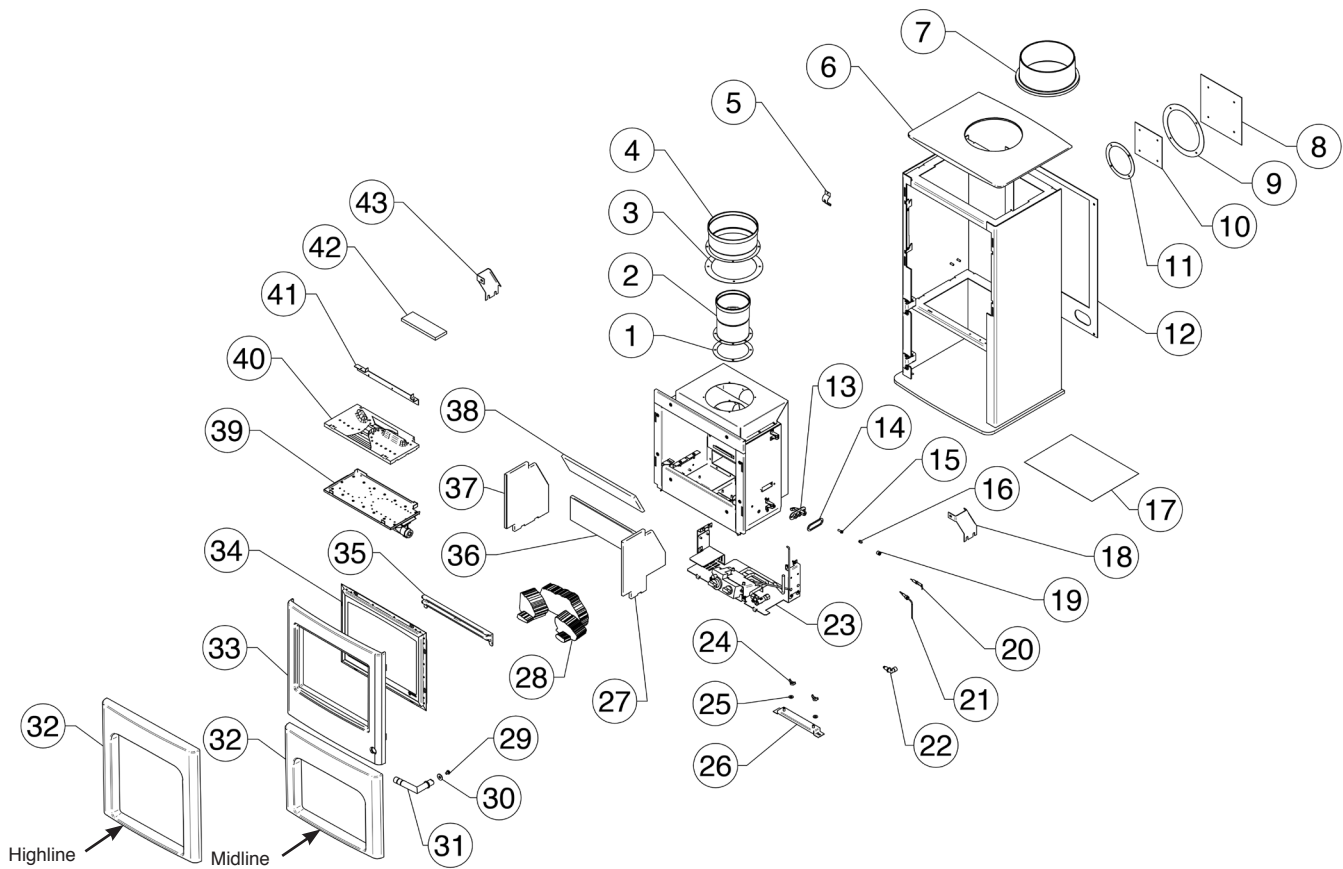


No.	Component	Part Code		Quantity
		Natural Gas	LPG	
1	Inner Spigot Gasket	CE0210		1
2	Inner Spigot	MEC0231		1
3	Outer Spigot Gasket	CE0211		1
4	Outer Spigot	MEC0232		1
5	Aeration Plate - ID Letter K	GZ3869		1
6	Cast Top	CA0728		1
7	Cast Flue Collar	CA0727		1
8	Outer Blanking Plate	GZ1321		1
9	Outer Spigot Gasket	CE0211		1
10	Inner Blanking Plate	GZ1320		1
11	Inner Spigot Gasket	CE0210		1
12	Back Panel	GZ8650		1
13	Pilot Burner Body	PI0051		1
14	Pilot Gasket	PI0052		1
15	Pilot Injector	PI0026	PI0015	1
16	Hook Olive	PI0013		1
17	Instruction Manual	PR2163		1
18	Rear Firebox Bracket RH	GZ8712		1
19	Hook Nut	PI0014		1
20	Electrode	PI0053		1
21	Thermocouple	PI0011		1
22	Elbow Injector	Size 158 IN0060	Size 110 IN0054	1

No.	Component	Part Code		Quantity
		Natural Gas	LPG	
23	Control Assembly	GZ12258		1
24	M6 Wing Nut	C94225		2
25	1/4" Washer	FA0024		2
26	Stove Floor Fixing Bracket	GZ9744		1
27	RH Ceramic Panel	CE1014		1
28	Log Set	CE0960		1
29	M6 x 16 CSK Pozi Screw	FA0053		1
30	M8 Washer	C92240		1
31	Door Handle Assembly	GZ9424		1
32	Bottom Door	Midline	CA0797	1
		Highline	CA0796	1
33	Main Door Assembly	GZ9756		1
34	Glass & Frame Assembly	GZ9752		1
35	Cast Log Guard	CA0744		1
36	Back Ceramic Panel	CE1015		1
37	LH Ceramic Panel	CE1013		1
38	Top Ceramic Panel	CE1016		1
39	Burner Assembly	GZ9646	GZ9647	1
40	Base Ceramic Panel	CE0997		1
41	Rear Log Guard	GZ9553		1
42	Embaglow Steel Fibre	GZ8471		1
43	Rear Firebox Bracket LH	GZ8710		1

Spare Parts List

16. Spare Parts List - Midline & Highline - Rear Exit

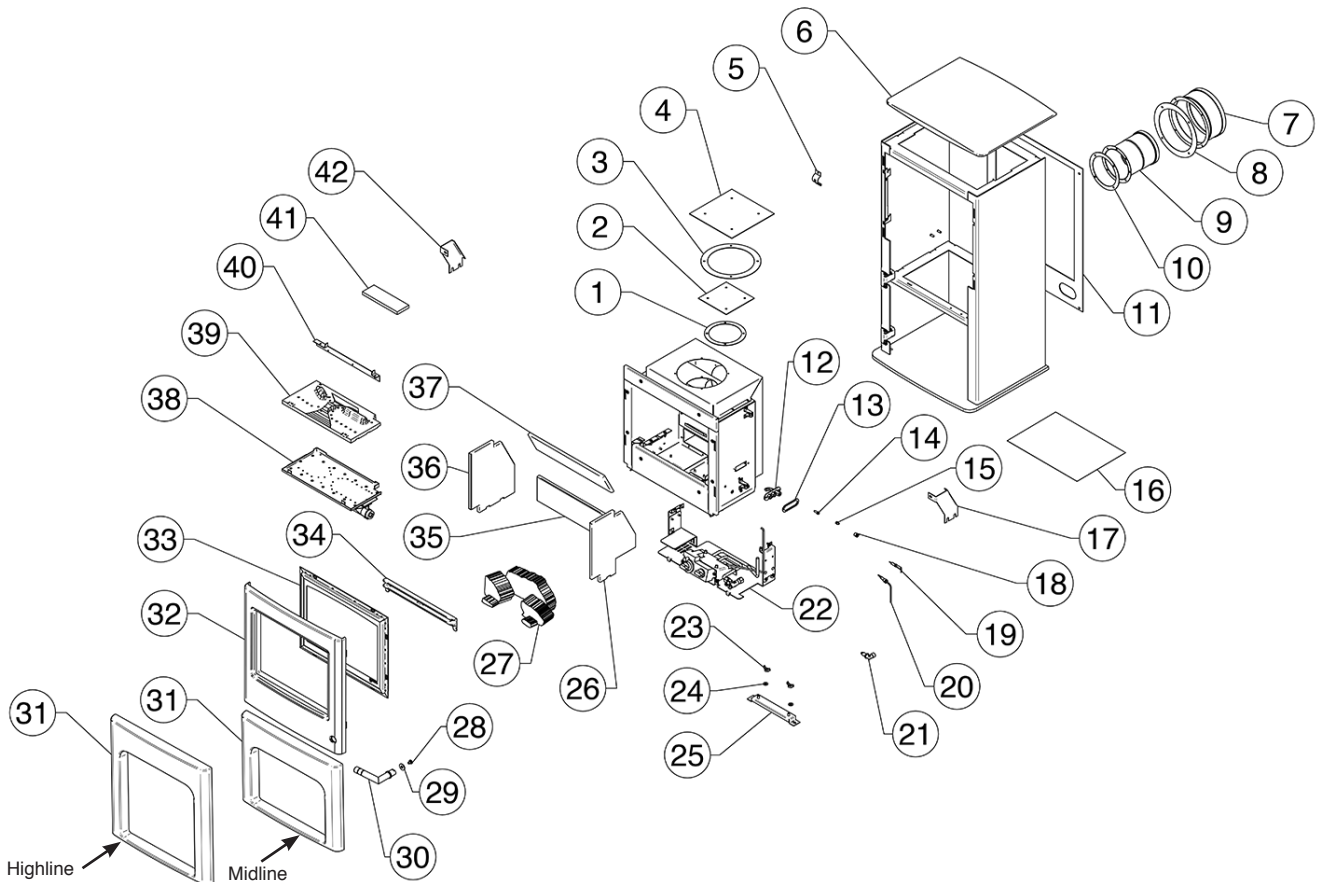


No.	Component	Part Code		Quantity
		Natural Gas	LPG	
1	Inner Spigot Gasket	CE0210		1
2	Inner Blanking Plate	GZ1320		1
3	Outer Spigot Gasket	CE0211		1
4	Outer Blanking Plate	GZ1321		1
5	Aeration Plate - ID Letter K	GZ3869		1
6	Cast Top	CA0740		1
7	Outer Spigot	MEC0232		1
8	Outer Spigot Gasket	CE0211		1
9	Inner Spigot	MEC0231		1
10	Inner Spigot Gasket	CE0210		1
11	Back Panel	GZ8650		1
12	Pilot Burner Body	PI0051		1
13	Pilot Gasket	PI0052		1
14	Pilot Injector	PI0026	PI0015	1
15	Hook Olive	PI0013		1
16	Instruction Manual	PR2163		1
17	Rear Firebox Bracket RH	GZ8712		1
18	Hook Nut	PI0014		1
19	Electrode	PI0053		1
20	Thermocouple	PI0011		1
21	Elbow Injector	Size 158 IN0060	Size 110 IN0054	1

No.	Component	Part Code		Quantity
		Natural Gas	LPG	
22	Control Assembly	GZ12258		1
23	M6 Wing Nut	C94225		2
24	1/4" Washer	FA0024		2
25	Stove Floor Fixing Bracket	GZ9744		1
26	RH Ceramic Panel	CE1014		1
27	Log Set	CE0960		1
28	M6 x 16 CSK Pozi Screw	FA0053		1
29	M8 Washer	C92240		1
30	Door Handle Assembly	GZ9424		1
31	Bottom Door	Midline	CA0797	1
		Highline	CA0796	1
32	Main Door Assembly	GZ9756		1
33	Glass & Frame Assembly	GZ9752		1
34	Cast Log Guard	CA0744		1
35	Back Ceramic Panel	CE1015		1
36	LH Ceramic Panel	CE1013		1
37	Top Ceramic Panel	CE1016		1
38	Burner Assembly	GZ9646	GZ9647	1
39	Base Ceramic Panel	CE0997		1
40	Rear Log Guard	GZ9553		1
41	Embaglow Steel Fibre	GZ8471		1
42	Rear Firebox Bracket LH	GZ8710		1

Servicing Instructions - Replacing Parts

16. Spare Parts List - Control Assembly

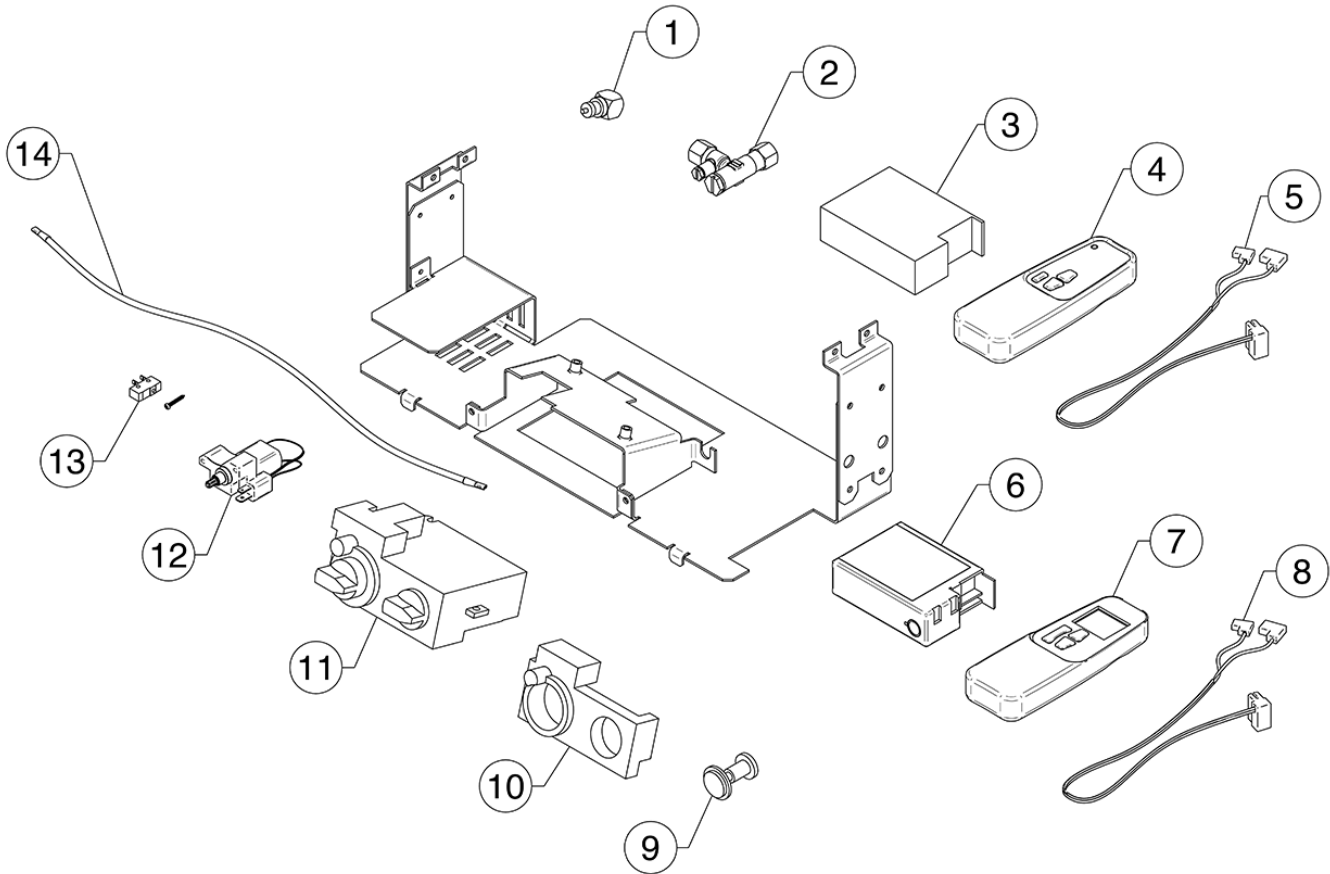

No.	Component	Part Code		Quantity
		Natural Gas	LPG	
1	Interrupter Block	GC0026		1
2	Inlet Isolation Valve	GC0095		1
3	Standard Receiver	EL0235		1
4	Standard Handset	EL0239		1
5	Standard Receiver Cable	EL0237		1
6	Thermostatic Receiver	EL0236		1
7	Thermostatic Handset	EL0240		1
8	Thermostatic Receiver Cable	EL0238		1
9	Magnetic Unit	GC0166		1
10	Control Valve Cover	GC0087		1
11	Control Valve	GC0088K		1
12	Geared Motor	EL0234		1
13	Micro Switch and Screw	EL0241		1
14	Ignition Lead	GC0090		1



Due to continual technical improvements please check online or with your Yeoman retailer for the most up to date parts lists.

Only use Genuine Yeoman spares when servicing your appliance.

All of our essential spare parts and consumable items are available to purchase from our webshop at www.yeomanspares.com.

Service Records

1ST SERVICE

Date of Service
Next Service Due
Signed
Retailer's Stamp/GasSafe Registration Number

3RD SERVICE

Date of Service
Next Service Due
Signed
Retailer's Stamp/GasSafe Registration Number

5TH SERVICE

Date of Service
Next Service Due
Signed
Retailer's Stamp/GasSafe Registration Number

7TH SERVICE

Date of Service
Next Service Due
Signed
Retailer's Stamp/GasSafe Registration Number

9TH SERVICE

Date of Service
Next Service Due
Signed
Retailer's Stamp/GasSafe Registration Number

2ND SERVICE

Date of Service
Next Service Due
Signed
Retailer's Stamp/GasSafe Registration Number

4TH SERVICE

Date of Service
Next Service Due
Signed
Retailer's Stamp/GasSafe Registration Number

6TH SERVICE

Date of Service
Next Service Due
Signed
Retailer's Stamp/GasSafe Registration Number

8TH SERVICE

Date of Service
Next Due
Signed
Retailer's Stamp/GasSafe Registration Number

10TH SERVICE

Date of Service
Next Service Due
Signed
Retailer's Stamp/GasSafe Registration Number

Information Requirement - Gas Heaters

Information Requirement for Gaseous Fuel Local Space Heater

Model	CL5 Midline Nat Gas	CL5 Midline LPG	CL5 Highline Nat Gas	CL5 Highline LPG
Fuel	Space Heating Emissions (NOx) - mg / kWh _{input} (GCV)	130	130	130

Heat Output	Nominal Heat Output - P_{nom}	3.3kW	3.3kW	3.3kW	3.3kW
	Minimum Heat Output (indicative) - P_{min}	1.6kW	1.6kW	1.6kW	1.6kW

Auxiliary Electricity Consumption	At Nominal Heat Output - $e_{l,max}$	N/A	N/A	N/A	N/A
	At Minimum Heat Output - $e_{l,min}$	N/A	N/A	N/A	N/A
	In Standby Mode - $e_{l,sb}$	N/A	N/A	N/A	N/A

Useful Efficiency	Useful Efficiency at nominal heat output - $\eta_{th,nom}$	84.3%	84.3%	84.3%	84.3%
	Useful Efficiency at minimum heat output (indicative) - $\eta_{th,min}$	70.0%	70.0%	70.0%	70.0%

Permanent Pilot Flame Power requirement	Permanent Pilot Flame Power requirement (if applicable) - P_{pilot}	0.200kW	0.200kW	0.200kW	0.200kW
--	---	---------	---------	---------	---------

Type of heat output/room temperature control

Electronic room temperature control + day timer	Yes	Yes	Yes	Yes
---	-----	-----	-----	-----

Other control options (multiple selections possible)

Room temperature control, with presence detection	No	No	No	No
Room temperature control, with open window detection	No	No	No	No
With distance control option	No	No	No	No
With adaptive start control	No	No	No	No
With working time limitation	No	No	No	No
With black bulb sensor	No	No	No	No

Energy Efficiency Index	77.2%	77.3%	77.2%	77.3%
Energy Efficiency Class	C*	C*	C*	C*

*When used with optional Thermostatic Control

Contact:	Gazco Ltd, Osprey Road, Sowton Industrial Estate, Exeter, EX2 7JG
-----------------	---



Yeoman Limited, Osprey Road, Sowton Industrial Estate, Exeter, Devon, England EX2 7JG
Technical Customer Services: (01392) 261950 Fax: (01392) 261951
E-mail: yeoman@gazco.com

A member of the Stovax Group
E & O E